

WAAS CH <b>53347</b> <b>W03A</b>	APP CRS <b>030°</b>	Rwy Ldg <b>4000</b> TDZE <b>21</b> Apt Elev <b>21</b>
--	------------------------	---

# RNAV (GPS) RWY 3


POINT HOPE (PHO) (PAPO)

RNP APCH - GPS.

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Rwy 3 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using LUR/PALU altimeter setting. When local altimeter setting not received, use LUR/PALU altimeter setting and increase LPV DA to 303 feet; increase LNAV/VNAV DA to 353 feet; increase all MDAs 100 feet and LNAV visibility Cat C/D 1/2 SM.



MISSED APPROACH: Climb to 500 then climbing right turn to 3300 direct COPOX and hold.

AWOS-3P <b>118.325</b>	ANCHORAGE CENTER <b>119.65 363.25</b>	KOTZEBUE RADIO <b>122.25</b>	CTAF <b>122.8</b> <b>⓪</b>
---------------------------	--	---------------------------------	-------------------------------

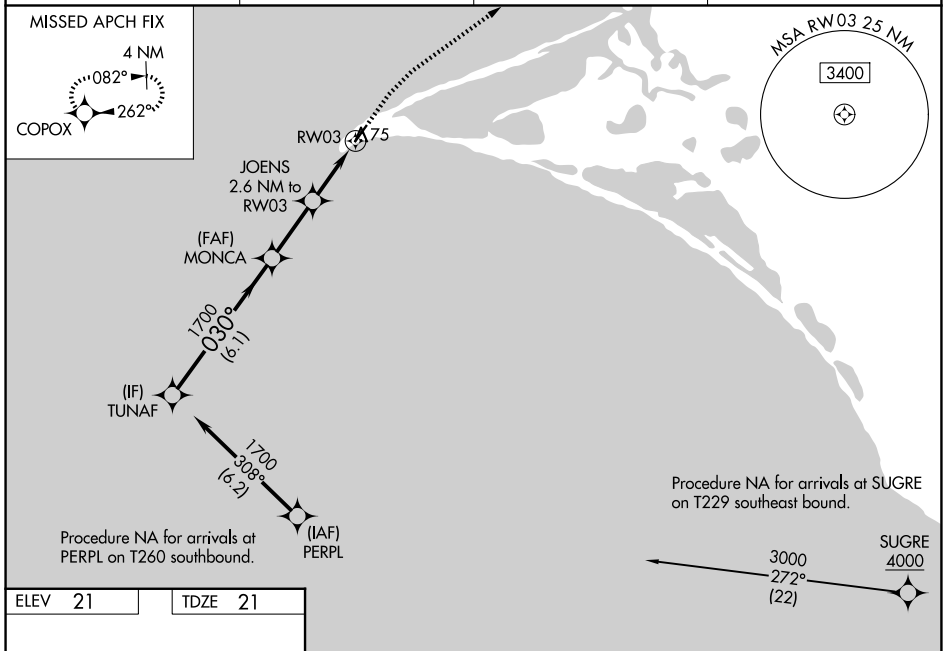

AK, 19 MAR 2026 to 14 MAY 2026

AK, 19 MAR 2026 to 14 MAY 2026

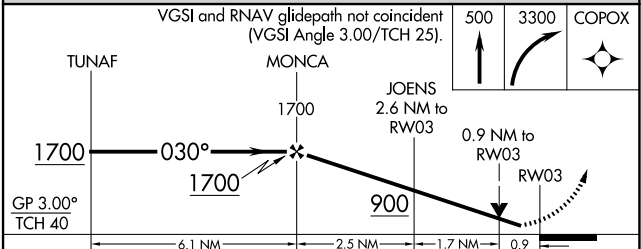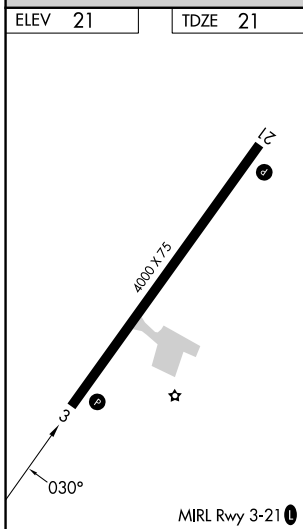

CATEGORY	A	B	C	D
LPV DA		221-1	200 (200-1)	
LNAV/VNAV DA		271-1	250 (300-1)	
LNAV MDA		340-1	319 (400-1)	
CIRCLING	380-1	480-1	480-1½	580-2
	359 (400-1)	459 (500-1)	459 (500-1½)	559 (600-2)