

WAAS CH 56440 W06A	APP CRS 058°	Rwy Ldg 3396 TDZE 574 Apt Elev 575
----------------------------------------	------------------------	---------------------------------------------------------------


RNAV (GPS) RWY 6

PAGELAND (PYG)

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities 1/4 SM. Increase all MDA 60 feet.

NA MISSED APPROACH: Climb to 2400 direct WOVEX and hold.


EQY ASOS 135.775	CHARLOTTE APP CON 120.05 307.8	(CTAF) 122.9
----------------------------	------------------------------------------	------------------------

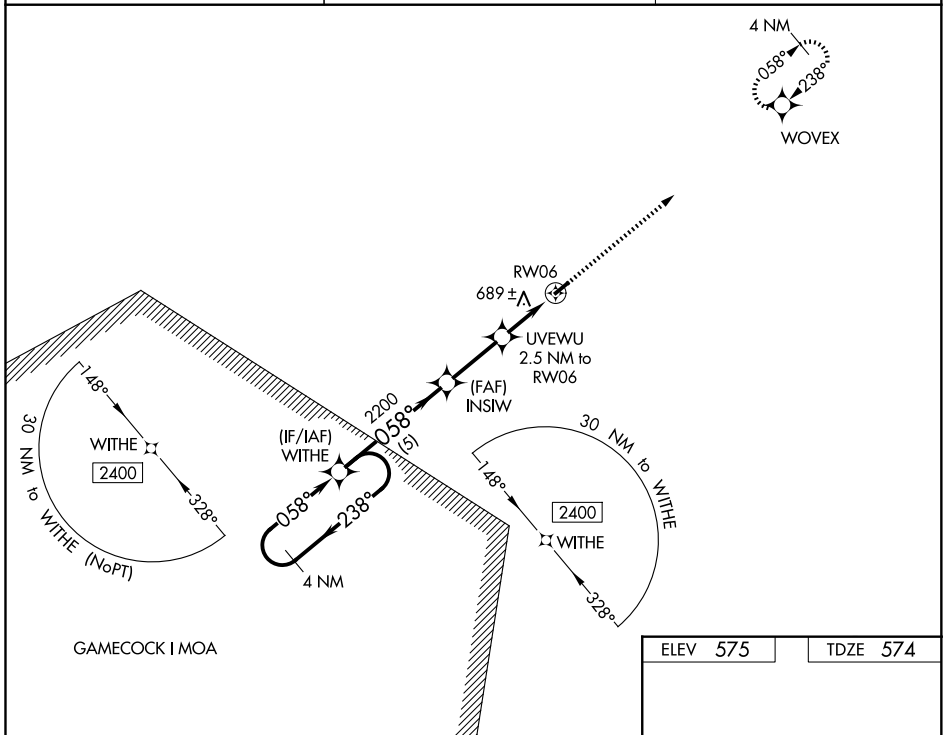


SE-2, 19 MAR 2026 to 16 APR 2026

SE-2, 19 MAR 2026 to 16 APR 2026

ELEV 575	TDZE 574
-----------------	-----------------

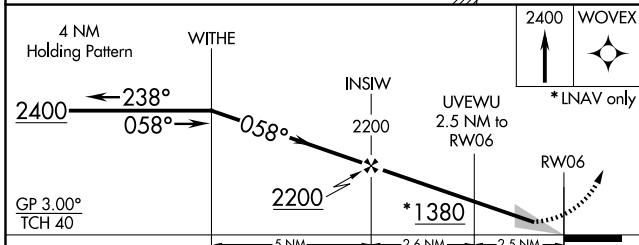

CATEGORY	A	B	C	D
LPV DA	889-1 1/8	315 (400-1 1/8)		NA
LNAV/VNAV DA	1085-1 1/8	511 (600-1 1/8)		NA
LNAV MDA	1020-1	446 (500-1)		NA
CIRCLING	1100-1 1/8	525 (600-1 1/8)		NA

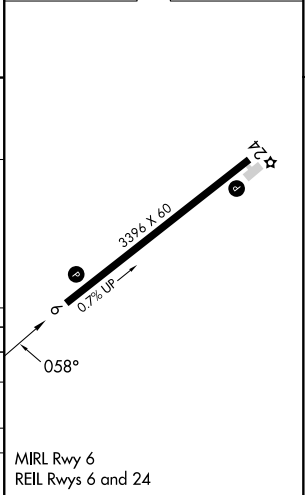

MIRL Rwy 6
REIL Rws 6 and 24