APP CRS	Rwy Ldg	12000
353°	TDZE	5434
	Apt Elev	5434

RNAV (RNP) Z RWY 35L

DENVER INTL (DEN)

RNP AR APCH - GPS. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below -26°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4500. Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 10000 direct MAXPU and track 360° to GLL VOR/DME and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	124.3 322.45	121.35 379.175 (W) 121.85 377.1 (E)

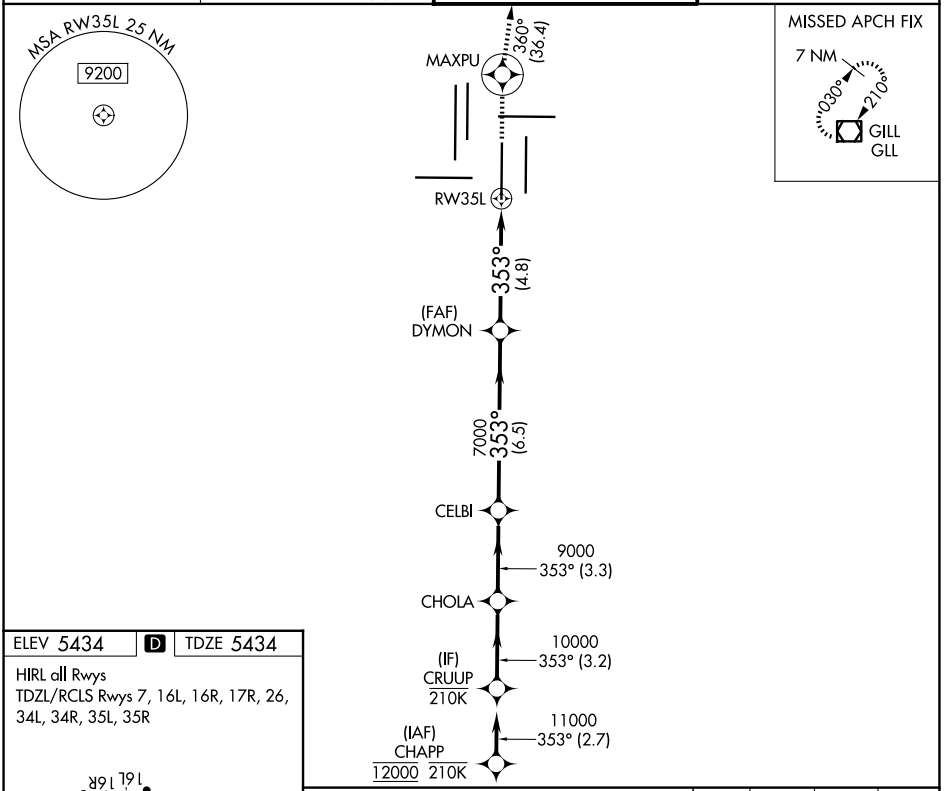

ELEV 5434 D TDZE 5434

HIRL all Rwys

TDZL/RCLS Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

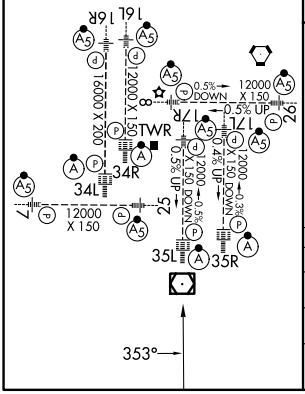

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

10000 MAXPU tr 360° GLL

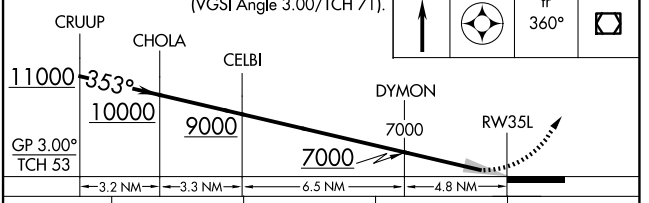

CATEGORY	A	B	C	D
RNP 0.10 DA	5695/24 261 (300-½)			
RNP 0.30 DA	5760/26 326 (400-½)			

AUTHORIZATION REQUIRED

SW-1, 19 MAR 2026 to 16 APR 2026
SW-1, 19 MAR 2026 to 16 APR 2026