RNAV (GPS) RWY 9L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

WAAS	APP CRS	Rwy Ldg	11730
CH 62800	095°	TDZE	1019
W09D		Apt Elev	1026

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Rwy 9L helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized with Rwy 8L or 8R or 10, or Rwy 8L and 10. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 4000 direct LEADR and on track 092° to CONNI and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER 8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	GND CON (8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
119.65	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

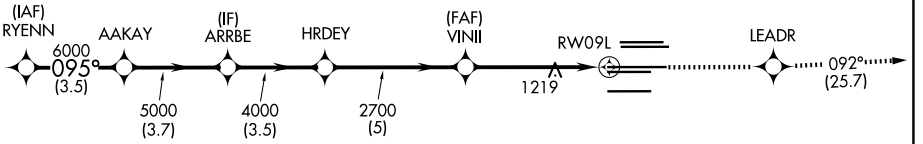





ELEV 1026 D TDZE 1019

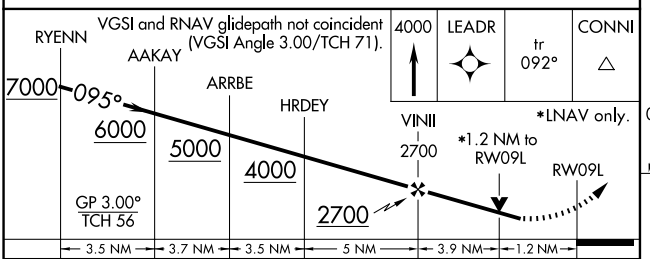



CATEGORY	A	B	C	D
LPV DA	1359/50	340 (400-1)		
LNAV/VNAV DA	1405/60	386 (400-1¼)		
LNAV MDA	1480/55	461 (500-1)	1480-1⅜	461 (500-1⅜)

HIRL all Rwys
TDZL/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 16 APR 2026 to 14 MAY 2026
SE-4, 16 APR 2026 to 14 MAY 2026