RNAV (RNP) Z RWY 21

CHARLESTON AFB/INTL (CHS)

APP CRS	Rwy Ldg	7000
211°	TDZE	43
	Apt Elev	46

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required.

MISSED APPROACH: Climb to 3000 on track 211° to FEPID and hold.

D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

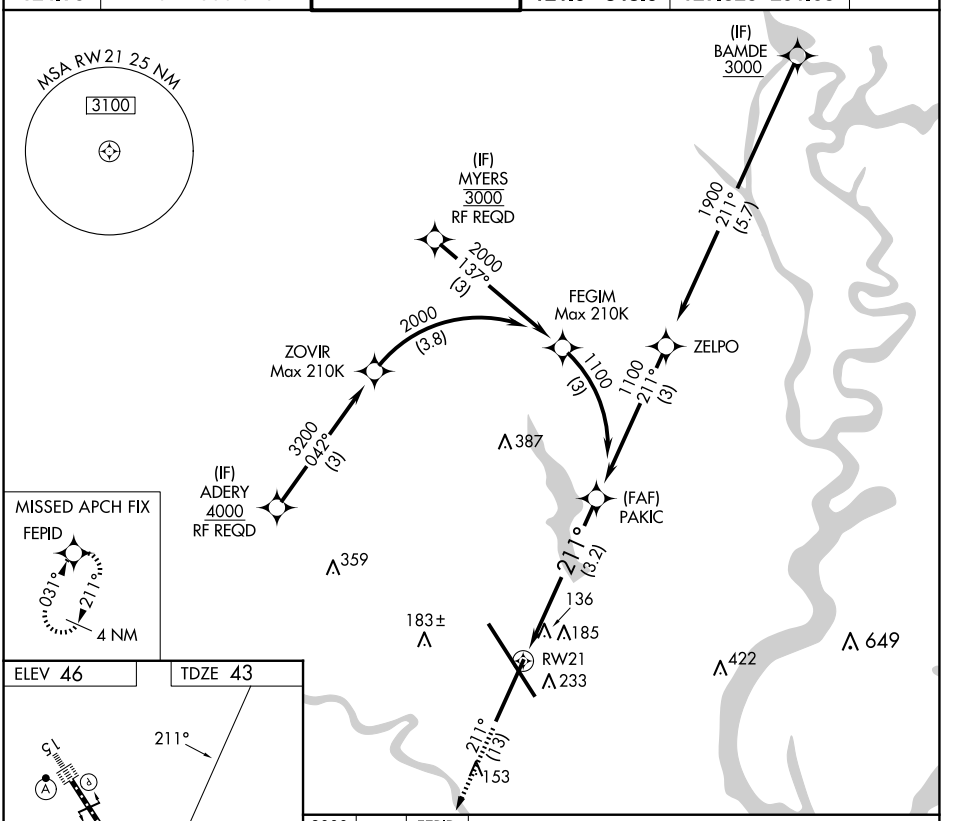

CATEGORY	A	B	C	D
RNP 0.21 DA		427-1⅛	384 (400-1⅛)	
RNP 0.30 DA		455-1⅜	412 (500-1⅜)	

AUTHORIZATION REQUIRED

TDZ/CL Rwy 15
REIL Rwys 3 and 21
HIRL Rwys 3-21 and 15-33

SE-2, 16 APR 2026 to 14 MAY 2026
SE-2, 16 APR 2026 to 14 MAY 2026