
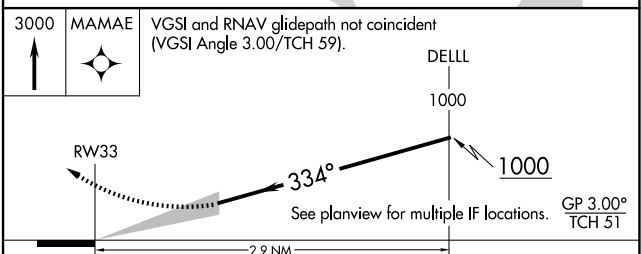
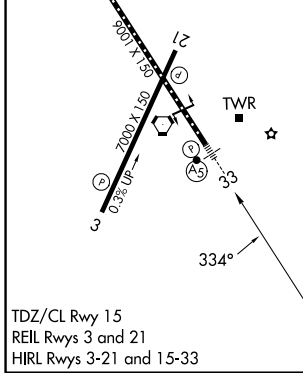


APP CRS 334°	Rwy Ldg 9001
	TDZE 45
	Apt Elev 46

RNAV (RNP) Z RWY 33

CHARLESTON AFB/INTL (CHS)

RNP AR APCH. RF required.		MALSR	MISSED APPROACH: Climb to 3000 direct MAMAE and hold, continue to climb-in-hold to 3000.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.23 all Cats visibility to RVR 5500.					
D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC

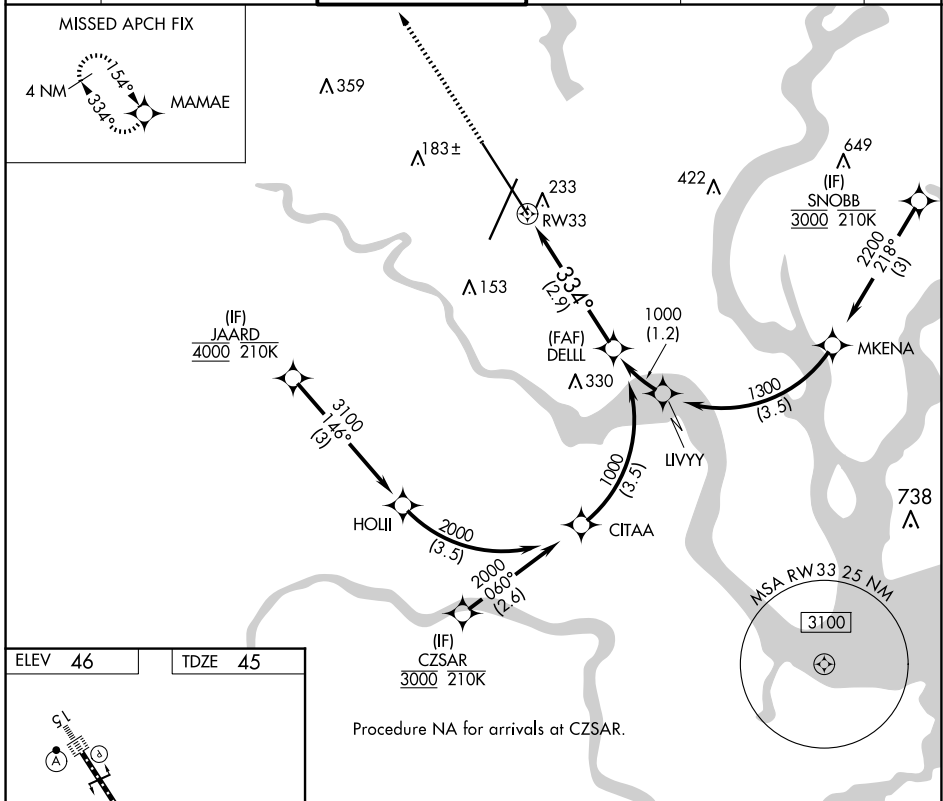

CATEGORY	A	B	C	D
RNP 0.23 DA		419/35	374 (400-3/4)	
RNP 0.30 DA		477/40	432 (500-3/4)	

AUTHORIZATION REQUIRED

SE-2, 16 APR 2026 to 14 MAY 2026

SE-2, 16 APR 2026 to 14 MAY 2026