WAAS CH 86699 W03A	APP CRS 031°	Rwy Ldg 7000 TDZE 35 Apt Elev 46

RNAV (GPS) Y RWY 3
CHARLESTON AFB/INTL (CHS)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct ALGOE and hold, continue climb-in-hold to 3000.

D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

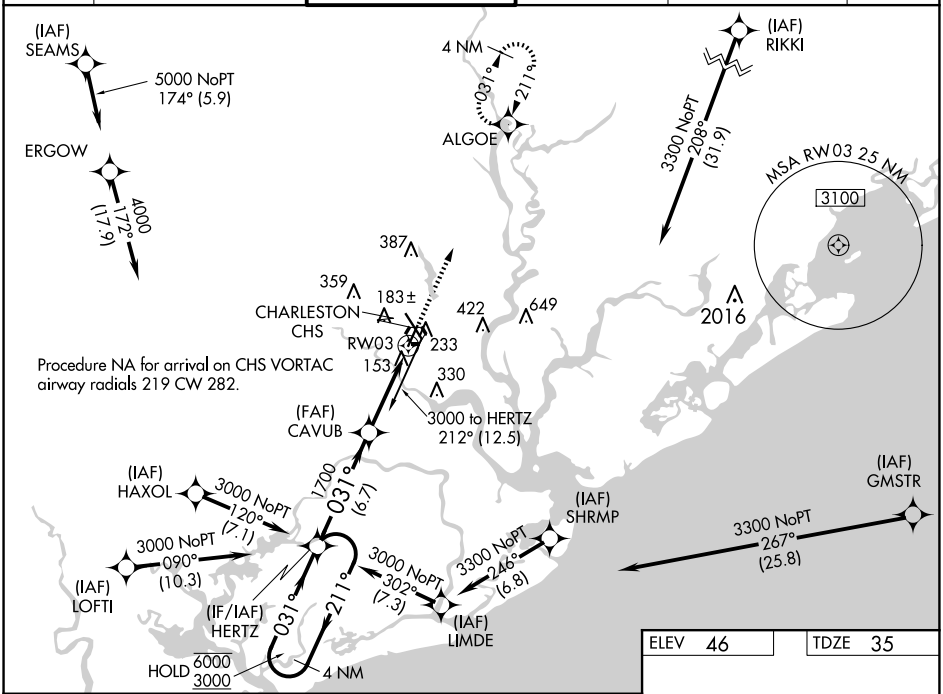

SE-2, 16 APR 2026 to 14 MAY 2026

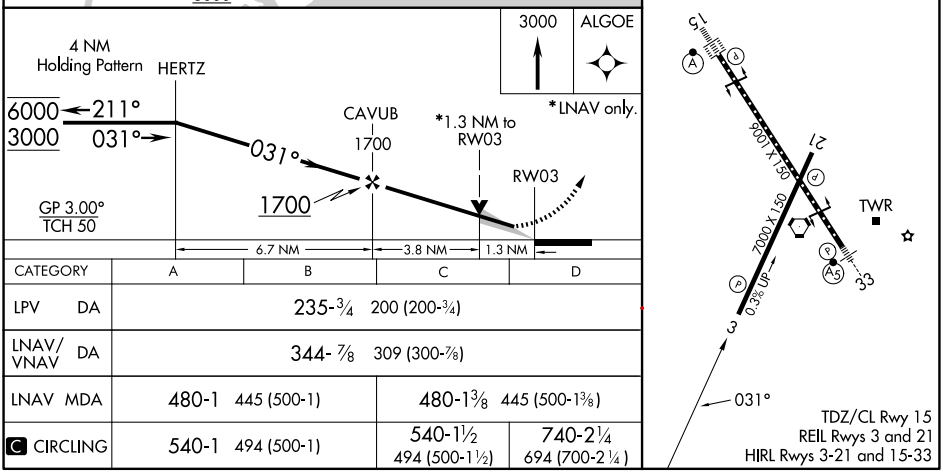

CATEGORY	A	B	C	D
LPV DA	235-¾ 200 (200-¾)			
LNAV/VNAV DA	344- ⅞ 309 (300-⅞)			
LNAV MDA	480-1 445 (500-1)		480-1⅜ 445 (500-1⅜)	
C CIRCLING	540-1 494 (500-1)		540-1½ 494 (500-1½)	740-2¼ 694 (700-2¼)