


|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-CHA<br><b>109.5</b> | APP CRS<br><b>202°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7400</b><br><b>673</b><br><b>683</b> |
|---------------------------|------------------------|-----------------------------|---|

# ILS or LOC RWY 20


LOVELL FLD (CHA)

|   |   |  |   |                                 |                         |
|---|---|--|---|---------------------------------|-------------------------|
| ADF required.   |   | ALSF-2<br>                                       | MISSED APPROACH: Climb to 1300 then climbing left turn to 3700 direct CQN NDB and hold, continue climb-in-hold to 3700. |                                 |                         |
| Disregard inner marker indication.<br>Circling to Rwy 15, 33 NA at night. |   |  |   |                                 |                         |
| ATIS<br><b>119.85</b>   | CHATTANOOGA APP CON *<br><b>125.1 379.1</b> | CHATTANOOGA TOWER *<br><b>118.3 (CTAF) 257.8</b> | GND CON<br><b>121.7 348.6</b>   | CLNC DEL<br><b>120.95 348.6</b> | UNICOM<br><b>122.95</b> |

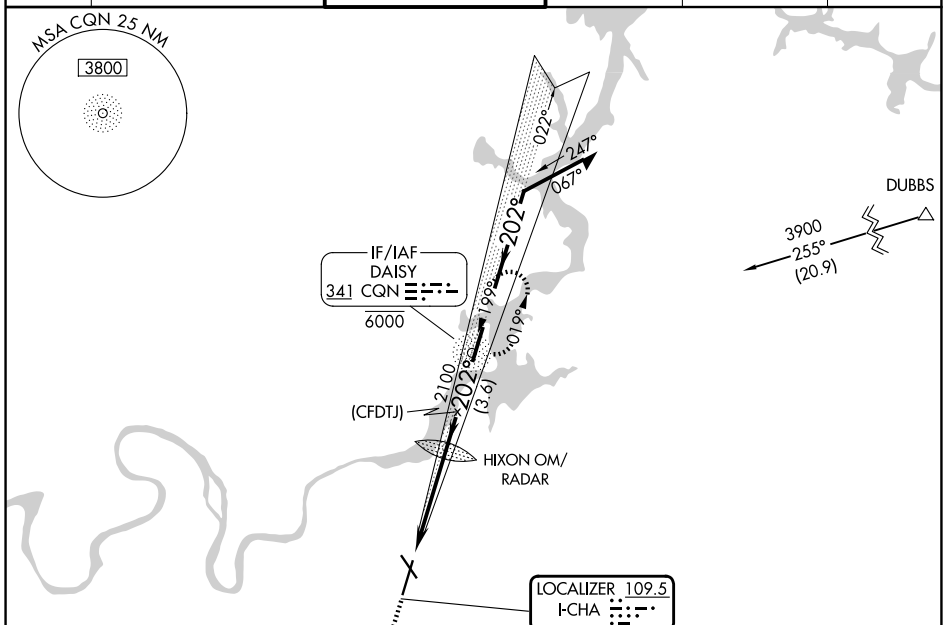

SE-1, 16 APR 2026 to 14 MAY 2026

SE-1, 16 APR 2026 to 14 MAY 2026

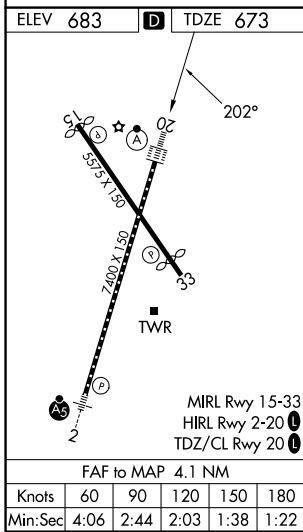

|          |                       |                       |                               |                       |
|----------|-----------------------|-----------------------|-------------------------------|-----------------------|
|          | 1300                  | 3700                  | CQN                           |                       |
|          |                       |                       |                               | Remain within 10 NM   |
|          |                       |                       | 6000 (CFDTJ)                  | 022°                  |
|          |                       |                       | HIXON OM/RADAR 2039           | 202°                  |
|          |                       |                       | 2500                          | 3000                  |
|          |                       |                       | 2100                          | GS 3.00° TCH 56       |
|          |                       |                       | 2500                          |                       |
|          | 4.1 NM                | 3.6 NM                |                               |                       |
| CATEGORY | A                     | B                     | C                             | D                     |
| S-ILS 20 | 873/18                |                       | 200 (200-1/2)                 |                       |
| S-LOC 20 | 1320/24               | 647 (700-1/2)         | 1320-1 3/8                    | 647 (700-1 3/8)       |
| CIRCLING | 1320-1<br>637 (700-1) | 1340-1<br>657 (700-1) | 1500-2 1/2<br>817 (900-2 1/2) | 1580-3<br>897 (900-3) |