RNAV (RNP) Y RWY 13L

CHICAGO MIDWAY INTL (MDW)

APP CRS	Rwy Ldg	6059
138°	TDZE	611
	Apt Elev	620

RNP AR APCH - GPS, RF. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

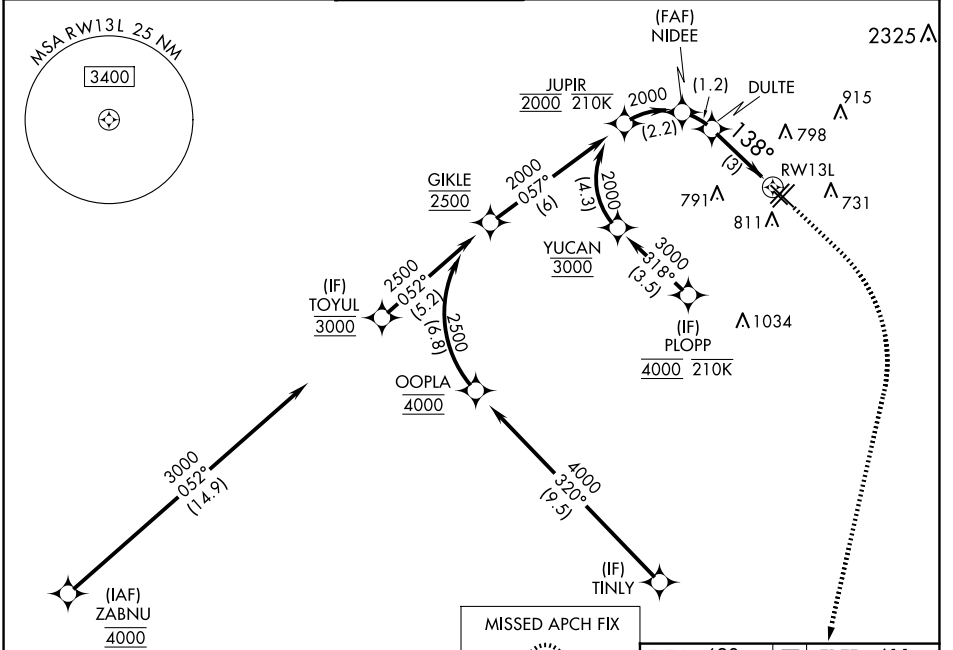

ELEV 620 D TDZE 611

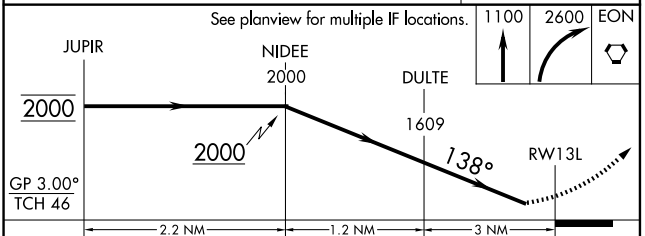

CATEGORY	A	B	C	D
RNP 0.10 DA		885/45	274 (300-⅞)	
RNP 0.20 DA		1005/60	394 (400-1¼)	
RNP 0.30 DA		1051-1¼	440 (500-1¼)	

AUTHORIZATION REQUIRED



HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L
REIL Rwys 4R, 22L, and 31R
RLLS Rwys 13L and 31R

EC-3, 16 APR 2026 to 14 MAY 2026
EC-3, 16 APR 2026 to 14 MAY 2026