

RNAV (RNP) Y RWY 4R

CHICAGO MIDWAY INTL (MDW)



APP CRS	Rwy Ldg	5927
047°	TDZE	619
	Apt Elev	620

RNP AR APCH - GPS.



▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

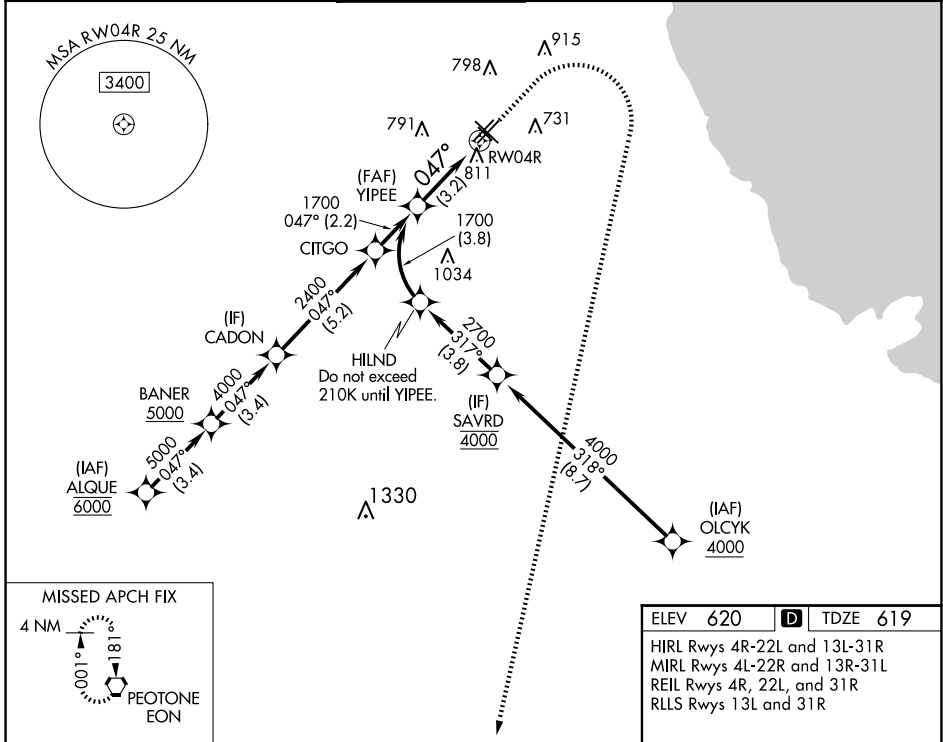

ELEV 620	D	TDZE 619
HIRL Rwy 4R-22L and 13L-31R		
MIRL Rwy 4L-22R and 13R-31L		
REIL Rwy 4R, 22L, and 31R		
RLS Rwy 13L and 31R		

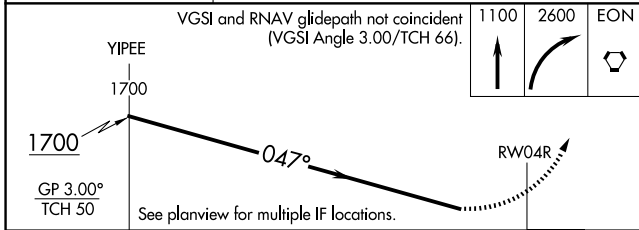

CATEGORY	A	B	C	D
RNP 0.10 DA		951/50	332 (400-1)	
RNP 0.20 DA		1020/60	401 (400-1¼)	
RNP 0.30 DA		1077-1⅝	458 (500-1⅝)	

AUTHORIZATION REQUIRED

EC-3, 16 APR 2026 to 14 MAY 2026

EC-3, 16 APR 2026 to 14 MAY 2026