LOC I-COS	APP CRS	Rwy Ldg	11022
109.9	352°	TDZE	6075
		Apt Elev	6187

ILS RWY 35L (SA CAT II)

CITY OF COLORADO SPRINGS MUNI (COS)

RADAR monitoring required when R-2601 in use. Requires specific OPSPEC, MSPEC, or LOA approval.

MALSR

MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON	CLNC DEL
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6	134.45 363.125

BLACK FOREST 112.5 BRK Chan 72

ADANE BRK 11.1

R-091

271°

091°

PUB R-354

LOCALIZER 109.9 I-COS

R-2602

MSA CO 25 NM

191° 9100 15300 251° 8100 021°

R-182

PETEY 407 CO

R-145

(IAF) DRAKE BRK 22.7

R-2601 A & B

AIRBURST X MOA

(IF) MIDAY INT BRK 22.7

8000 352° (7.4)

LR-176

8000 BRK 22.7 Arc

R-313

8000 313° (21.4)

172°

IAF PUEBLO 116.7 PUB Chan 114

Procedure NA for arrival on PUB VORTAC airway radials 267 CW 354 .

ELEV 6187 D TDZE 6075

HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZ/CL Rwys 17L and 35R
MIRL Rwy 13-31



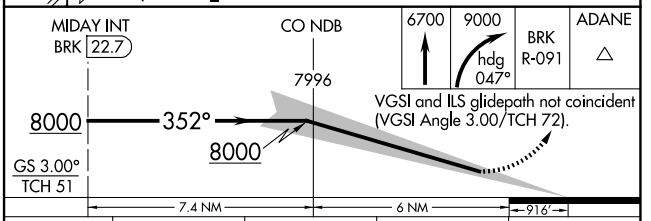

CATEGORY	A	B	C	D
S-ILS 35L	RA 123/12 100 DA 6175			

SA CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-1, 16 APR 2026 to 14 MAY 2026
SW-1, 16 APR 2026 to 14 MAY 2026