


RNAV (RNP) Z RWY 28R

JOHN GLENN COLUMBUS INTL (CMH)


APP CRS	Rwy Ldg	8000
281°	TDZE	813
	Apt Elev	815

RNP AR APCH. MALSR 

For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.16 all Cats visibility to RVR 4500 and increase RNP 0.30 all Cats visibility to RVR 5500. Simultaneous approach authorized.

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 to APE VORTAC and hold.

D-ATIS 124.6	COLUMBUS APP CON 125.95 371.975	COLUMBUS TOWER 132.7 257.8	GND CON 121.9 348.6
------------------------	---	--------------------------------------	-------------------------------

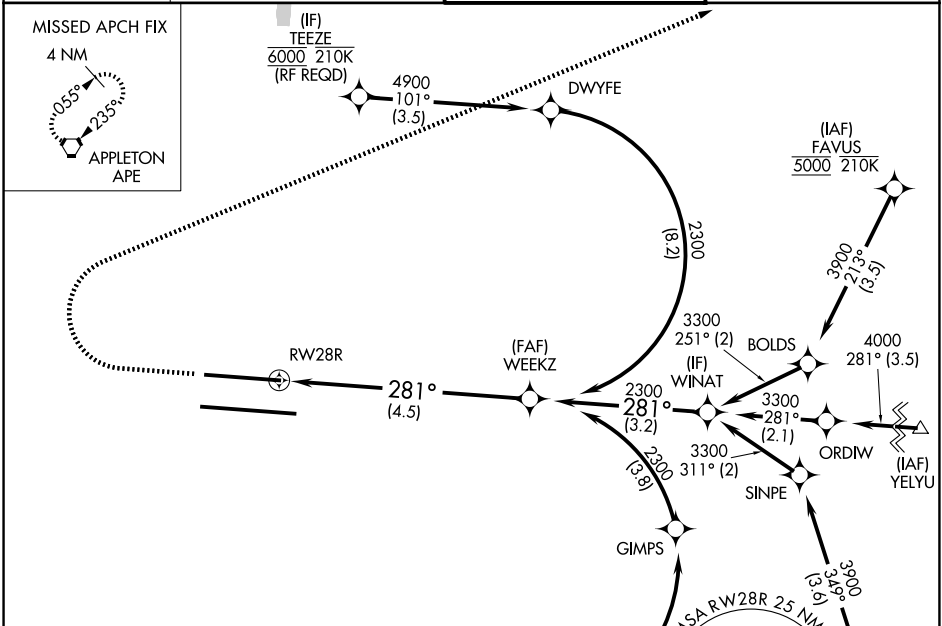

EC-2, 16 APR 2026 to 14 MAY 2026

EC-2, 16 APR 2026 to 14 MAY 2026

ELEV 815	D	TDZE 813
----------	----------	----------

See planview for multiple IF locations.

1400	3000	APE
------	------	-----

WEEKZ	2300
-------	------

RW28R	4.5 NM	2300	GP 3.00°	TCH 50
-------	--------	------	----------	--------

TDZL/RCLS Rwy 10R-28L	
HIRL Rwy 10R-28L and 10L-28R	

CATEGORY	A	B	C	D
RNP 0.16 DA	1129/24	316 (400-½)		
RNP 0.30 DA	1185/35	372 (400-¾)		

AUTHORIZATION REQUIRED