APP CRS	Rwy Ldg	9025
265°	TDZE	3962
	Apt Elev	3962

RNAV (RNP) Z RWY 26L

EL PASO INTL (ELP)

ASR For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALSR, increase RNP 0.30 visibility all Cats to 1 mile. GPS Required.

MALSR

MISSED APPROACH: Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.

D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON	CLNC DEL
120.0 254.3	124.25 298.85	118.3 239.275	121.9 348.6	125.0 379.1

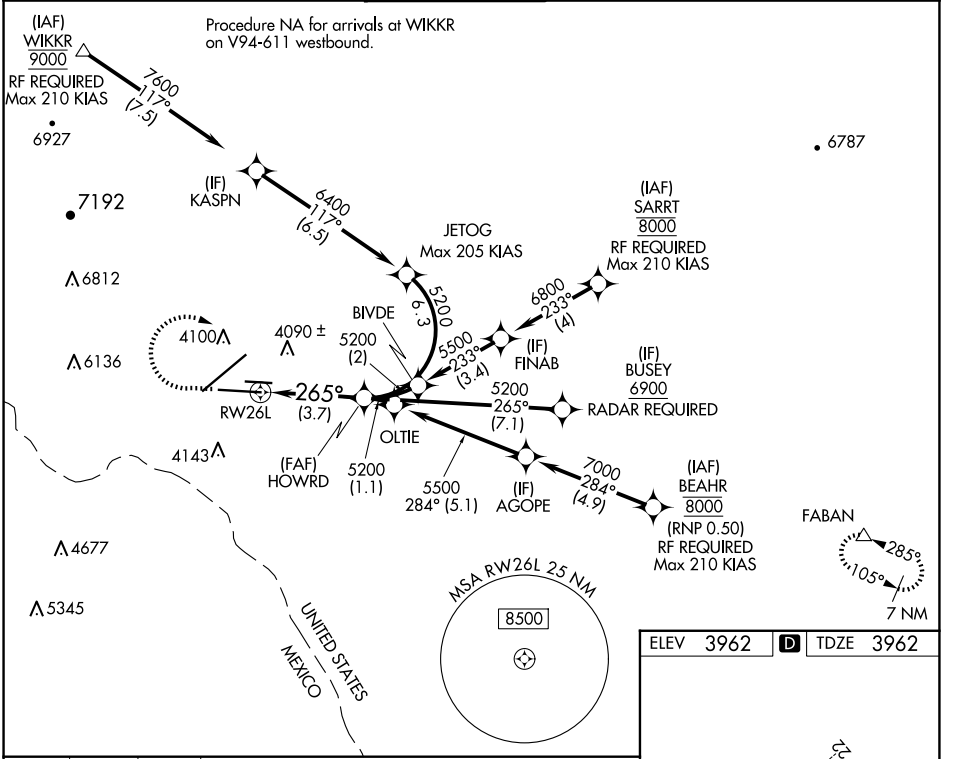

ELEV 3962 D TDZE 3962



MIRL Rwy 8L-26R
REIL Rwys 4 and 8R
HIRL Rwys 4-22 and 8R-26L

4400	7500	FABAN
↑	↱	△

VGSI and glidepath not coincident (VGSI Angle 3.00/TCH 75).

See planview for multiple IF locations.

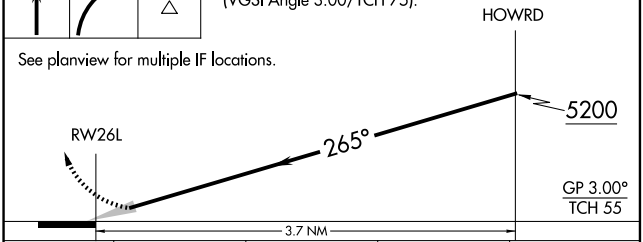

CATEGORY	A	B	C	D
RNP 0.30 DA	4275-½	313 (400-½)		

AUTHORIZATION REQUIRED

SC-3, 16 APR 2026 to 14 MAY 2026
SC-3, 16 APR 2026 to 14 MAY 2026