



WAAS CH <b>86406</b> <b>W23A</b>	APP CRS <b>230°</b>	Rwy Ldg <b>10000</b> TDZE <b>790</b> Apt Elev <b>796</b>
--	------------------------	--

# RNAV (GPS) Y RWY 23L


INDIANAPOLIS INTL (IND)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct OZMOE and hold.
<p>▼ LNAV procedure NA during simultaneous operations. Simultaneous approach authorized.</p> <p>▲ Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA.</p>			

D-ATIS <b>134.25</b>	INDIANAPOLIS APP CON <b>128.175 317.8</b>	INDY TOWER <b>120.9 251.1</b>	GND CON <b>121.9</b>	CLNC DEL <b>128.75 251.1</b>	CPDLC
-------------------------	--	----------------------------------	-------------------------	---------------------------------	-------

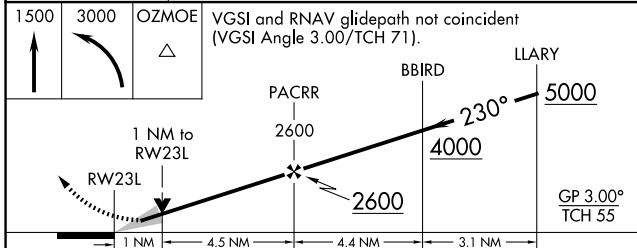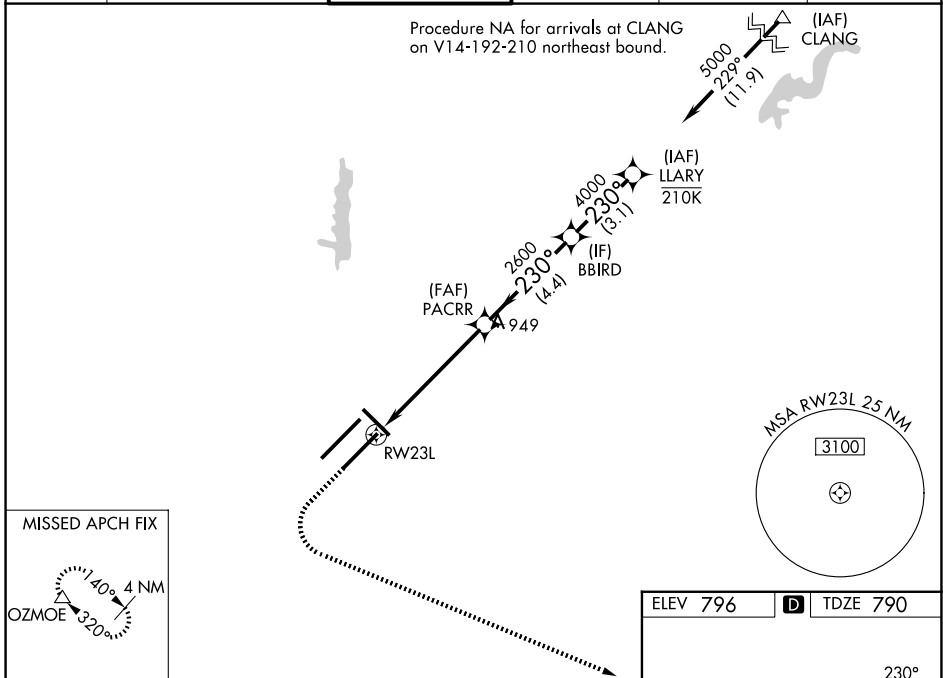

CATEGORY	A	B	C	D
LPV DA*	990/24 200 (200-½)			
LNAV/VNAV DA	1078/24 288 (300-½)			
LNAV MDA	1180/24 390 (400-½)		1180/35 390 (400-¾)	
CIRCLING	1420-1 624 (700-1)		1420-1¾ 624 (700-1¾) 1560-2½ 764 (800-2½)	

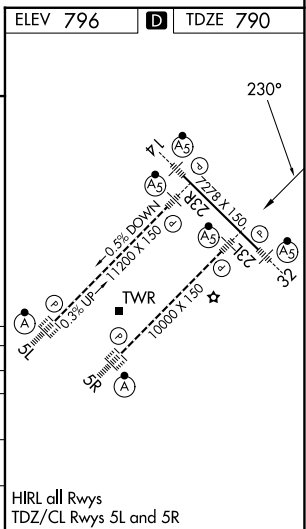

EC-2, 16 APR 2026 to 14 MAY 2026

EC-2, 16 APR 2026 to 14 MAY 2026