



WAAS CH 50101 W27A	APP CRS 274°	Rwy Ldg TDZE Apt Elev	6000 32 33
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27R

MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct CEJNO and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.	

ATIS 132.55	ORLANDO APP CON 126.025 281.425	MELBOURNE TOWER ★ 118.2 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

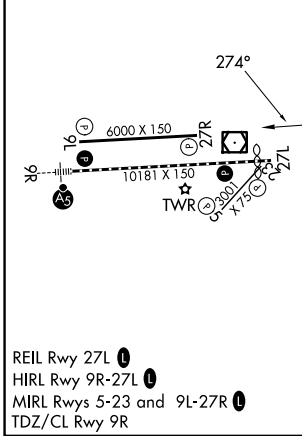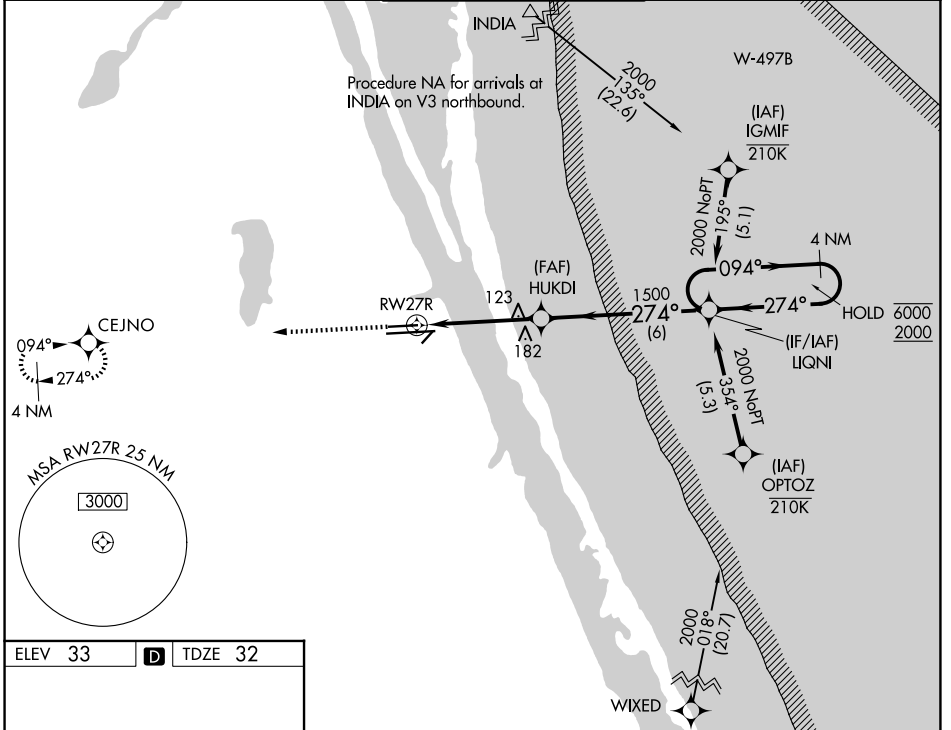

2000	CEJNO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).	4 NM Holding Pattern	
			LIQNI	
		HUKDI		
		1.1 NM to RW27R		
		1500		
		274°		
		1500		
		094°	6000	
		274°	2000	
			GP 3.00°	
			TCH 55	
CATEGORY	A	B	C	D
LPV DA		232-3/4	200 (200-3/4)	
LNAV/VNAV DA		282-3/4	250 (300-3/4)	
LNAV MDA		400-1	368 (400-1)	
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1 3/4 647 (700-1 3/4)	880-2 3/4 847 (900-2 3/4)

SE-3, 16 APR 2026 to 14 MAY 2026

SE-3, 16 APR 2026 to 14 MAY 2026