WAAS	APP CRS	Rwy Ldg	4797
CH 99342	136°	TDZE	671
W13A		Apt Elev	729

RNAV (GPS) RWY 13

GENERAL MITCHELL INTL (MKE)

RNP APCH.

▼ Rwy 13 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

MISSED APPROACH: Climb to 2900 direct DUSAY and hold.

D-ATIS	MILWAUKEE APP CON	MILWAUKEE TOWER	GND CON	CLNC DEL	CPDLC
126.4	126.5 307.0	124.575 269.05	121.8 263.125	120.8	

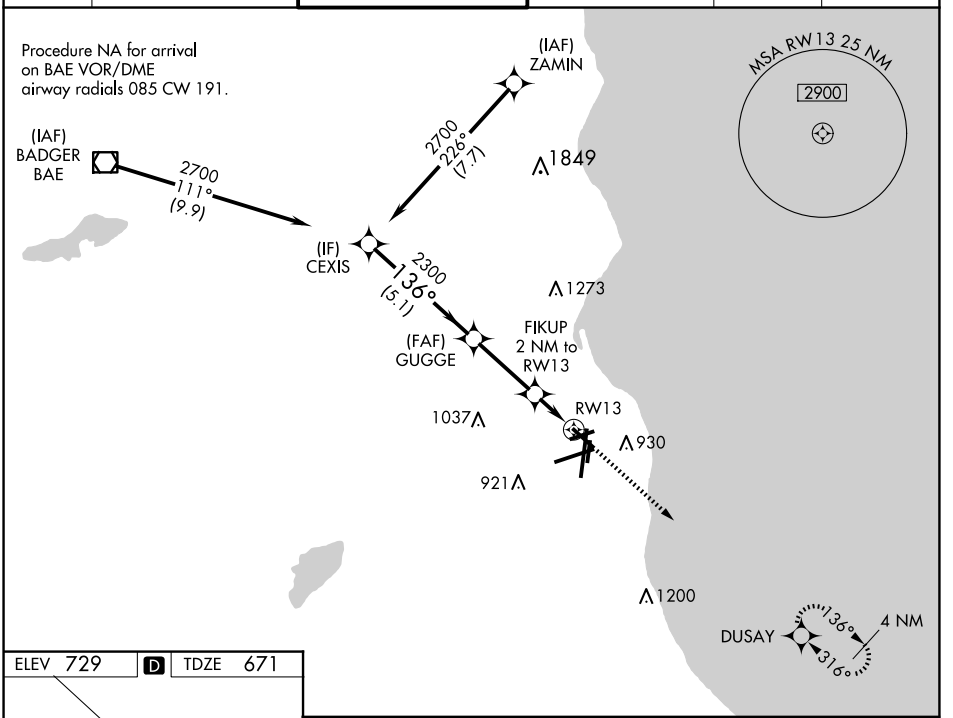

ELEV 729 | D | TDZE 671

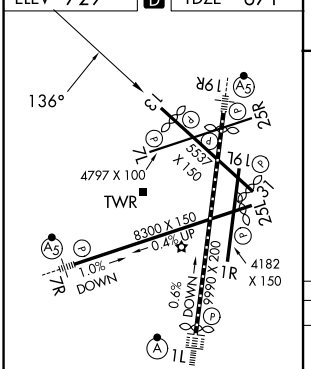

TDZ/CL Rwy 1L
REIL Rwys 1R, 7L, 13, 25L, 25R, and 31
HIRL Rwys 1L-19R and 7R-25L
MIRL Rwys 1R-19L, 13-31, and 7L-25R

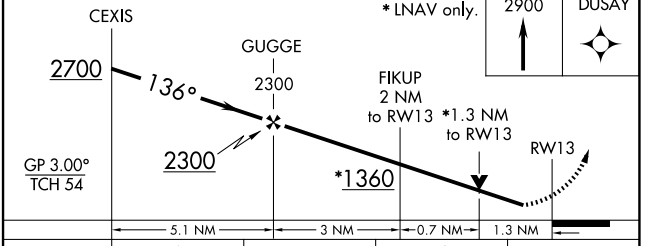

CATEGORY	A	B	C	D
LPV DA	971-1	300 (300-1)		
LNAV/VNAV DA	1189-1⅜	518 (500-1⅜)		
LNAV MDA	1140-1	469 (500-1)	1140-1⅜	469 (500-1⅜)
C CIRCLING	1240-1	511 (600-1)	1240-1½ 511 (600-1½)	1360-2 631 (700-2)

EC-3, 16 APR 2026 to 14 MAY 2026
EC-3, 16 APR 2026 to 14 MAY 2026