


| | | | |
|---------------------------|------------------------|-----------------|------------|
| LOC I-MZR 109.5 | APP CRS 222° | Rwy Ldg 7504 | TDZE 78 |
| | | Apt Elev 79 | |

ILS or LOC RWY 22


MONROE RGNL (MLU)

| | | | |
|---|--|-------|---|
| DME or RADAR required for procedure entry. | | MALSR | MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000. |
| ⚠ Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1½ SM. # DME from MLU VORTAC. | | | |

| | | | | |
|-----------------------|---|---|-------------------------|-------------------------|
| ATIS 125.05 | MONROE APP CON * 118.15 290.475 | MONROE TOWER * 118.9 (CTAF) 0 257.8 | GND CON 121.9 | UNICOM 122.95 |
|-----------------------|---|---|-------------------------|-------------------------|

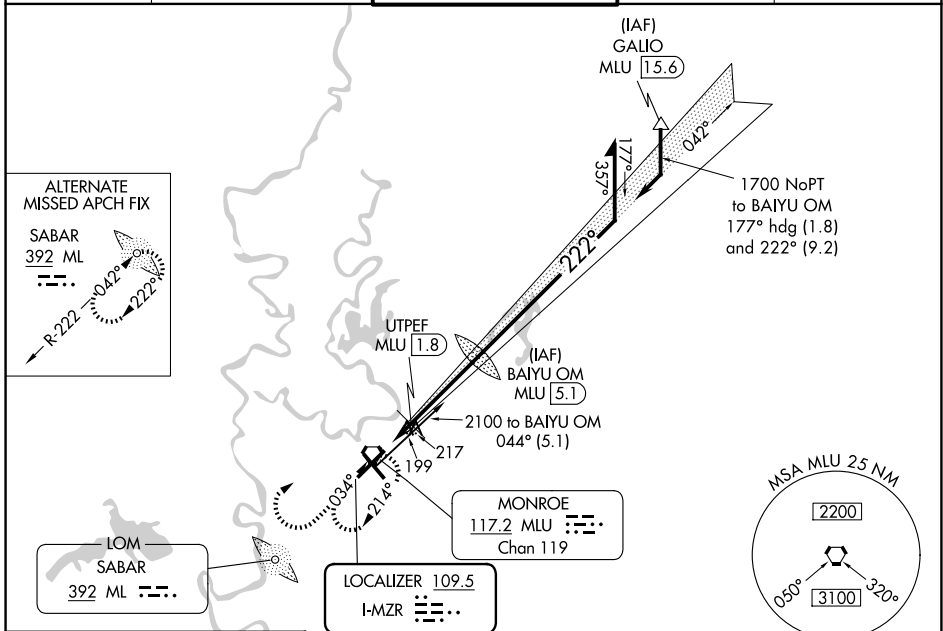


| | | |
|---------|----------|---------|
| ELEV 79 | D | TDZE 78 |
|---------|----------|---------|

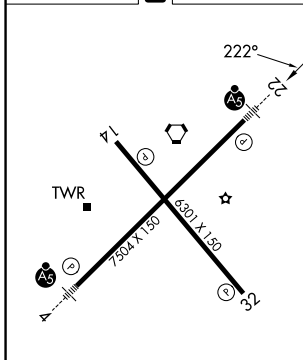

REIL Rws 14 and 32
MIRL Rwy 14-32
HIRL Rwy 4-22

FAF to MAP 4.8 NM

| | | | | | |
|---------|------|------|------|------|------|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 4:48 | 3:12 | 2:24 | 1:55 | 1:36 |

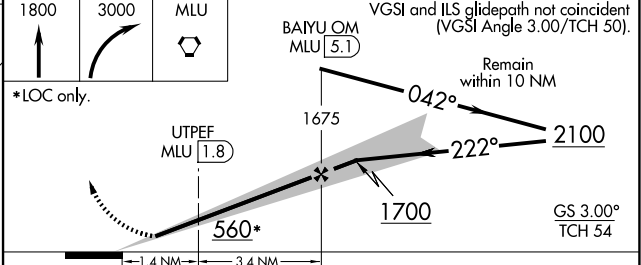

| | | | | |
|---------------------|-------------------|-------------|----------------------|-------------------------|
| CATEGORY | A | B | C | D |
| S-ILS 22 | 278-½ 200 (200-½) | | | |
| S-LOC 22 | 560-½ | 482 (500-½) | 560-1 | 482 (500-1) |
| CIRCLING | 580-1 | 501 (600-1) | 740-¾ 661 (700-¾) | 1160-3 1081 (1100-3) |
| # UTPF FIX MINIMUMS | | | | |
| S-LOC 22 | 500-½ | 422 (500-½) | 500-¾ | 422 (500-¾) |
| CIRCLING | 580-1 | 501 (600-1) | 740-¾ 661 (700-¾) | 1160-3 1081 (1100-3) |

SC-4, 16 APR 2026 to 14 MAY 2026

SC-4, 16 APR 2026 to 14 MAY 2026