

LOC I-MLU 109.5	APP CRS 042°	Rwy Ldg 7504 TDZE 78 Apt Elev 79
---------------------------	------------------------	---

ILS or LOC RWY 4

MONROE RGNL (MLU)

ADF or DME required for procedure entry.

MALS

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold.

UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500.



ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA.

DME from MLU VORTAC.

ATIS 125.05	MONROE APP CON * 118.15 290.475	MONROE TOWER * 118.9(CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

ALTERNATE MISSED APCH FIX

SABAR
MLU **5.1**
ML **392**

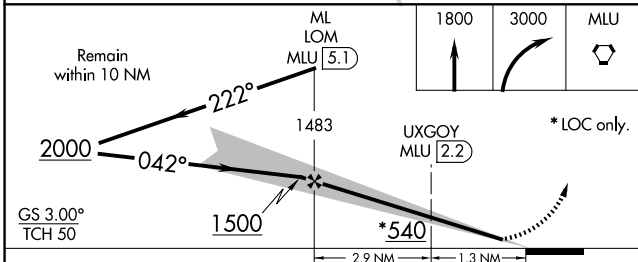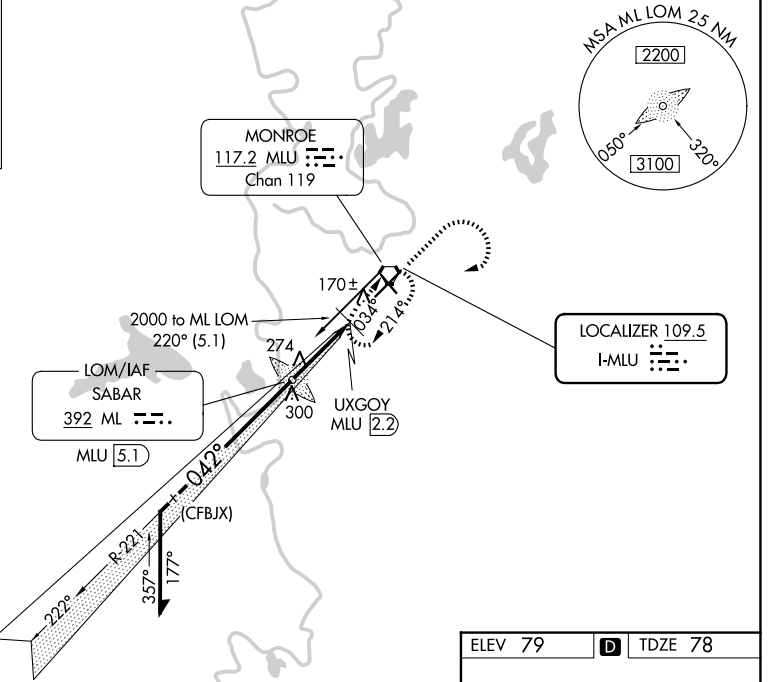

ELEV 79	D	TDZE 78
---------	----------	---------

TWR

REIL Rwy 14 and 32
MIRL Rwy 14-32 **1**
HIRL Rwy 4-22 **1**

7504 X 150
5302 X 150

4.2 NM

FAF to MAP 4.2 NM	Knots	60	90	120	150	180
	Min:Sec	4:12	2:48	2:06	1:41	1:24

CATEGORY	A	B	C	D
S-ILS 4		**278/24	200 (200-½)	
S-LOC 4	540/24	462 (500-½)	540/50	462 (500-1)
CIRCLING	580-1	501 (600-1)	740-1¾ 661(700-1¾)	1160-3 1081 (1100-3)
# UXGOY FIX MINIMUMS				
S-LOC 4	420/24	342 (400-½)	420/30	342 (400-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

SC-4, 16 APR 2026 to 14 MAY 2026

SC-4, 16 APR 2026 to 14 MAY 2026