RNAV (GPS) RWY 10

MONTGOMERY RGNL (DANNELLY FLD) (MGM)

WAAS	APP CRS	Rwy Ldg	9020
CH 50100	097°	TDZE	219
W10A		Apt Elev	232

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C . For inop MALSR, increase LPV Cat E visibility to RVR 4000; increase LNAV/VNAV Cat E visibility to RVR 5000; increase LNAV Cats C/D/E visibility to 1⅛ mile. Circling for Cat E NA north of Rwy 10-28.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2600 direct ICOTE and hold.

ATIS	MONTGOMERY APP CON★	DANNELLY TOWER★	GND CON	UNICOM
120.675	124.0 363.025	119.7 (CTAF)L 360.85	121.7 348.6	122.95

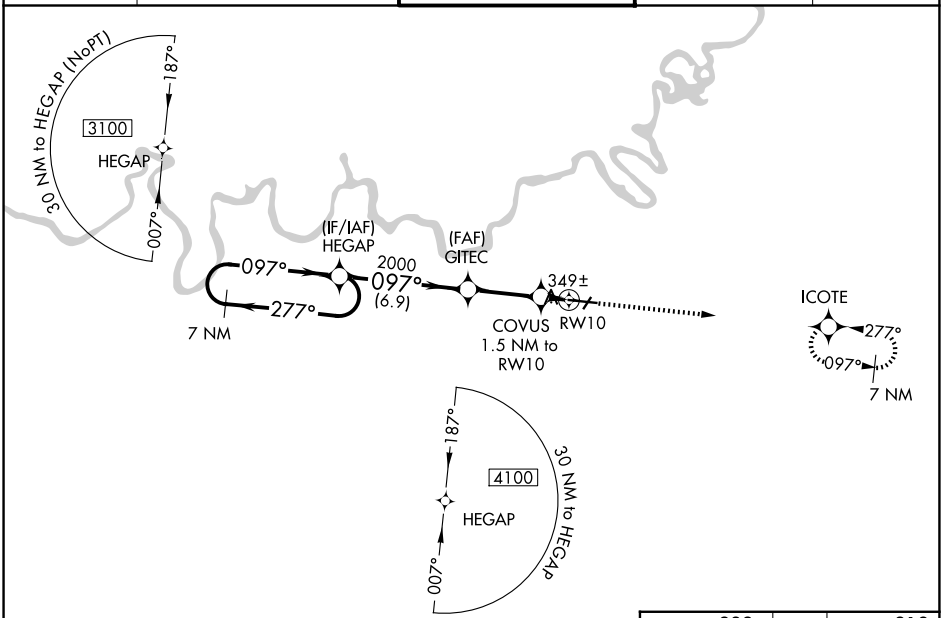

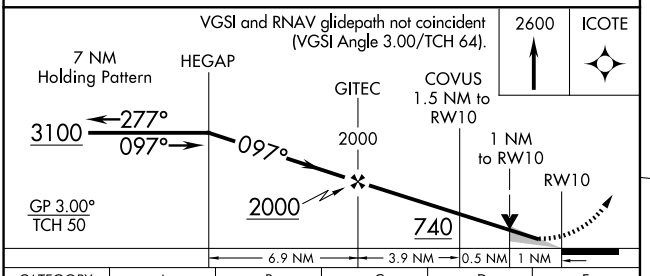

CATEGORY	A	B	C	D	E
LPV DA **	419/24 200 (200-½)				
LNAV/VNAV DA	530/24 311 (300-½)				
LNAV MDA	600/24 381 (400-½)		600/35 381 (400-⅝)		
CIRCLING	700-1 468 (500-1)		800-1½ 568 (600-1½)	860-2 628 (700-2)	860-2¼ 628 (700-2¼)

ELEV 232 TDZE 219



REIL Rwy 3 L
MIRL Rwy 3-21
HIRL Rwy 10-28

SE-4, 16 APR 2026 to 14 MAY 2026