RNAV (RNP) Z RWY 22

LAGUARDIA (LGA)

APP CRS	Rwy Ldg	7002
224°	TDZE	12
	Apt Elev	21

RNP AR APCH - GPS. RF required.

NA For uncompensated Baro-VNAV systems, procedure NA below -11°C or above 54°C. For inop ALS, increase RNP 0.30 DA* visibility to RVR 5500.

ALSF-1

MISSED APPROACH: Climb to 3000 direct PROUD and hold, continue climb-in-hold to 3000. *Missed approach requires minimum climb of 397 feet per NM to 560.

D-ATIS	NEW YORK APP CON	LAGUARDIA TOWER	GND CON
125.95	120.8 263.0	118.7 263.0	121.7 263.0

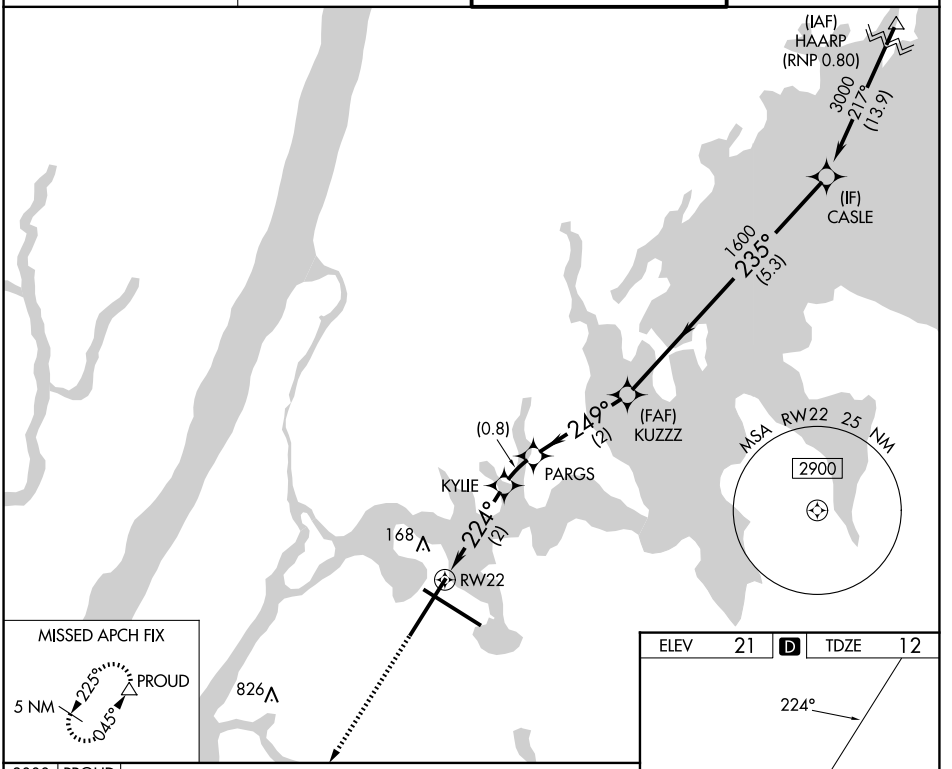

MISSED APCH FIX

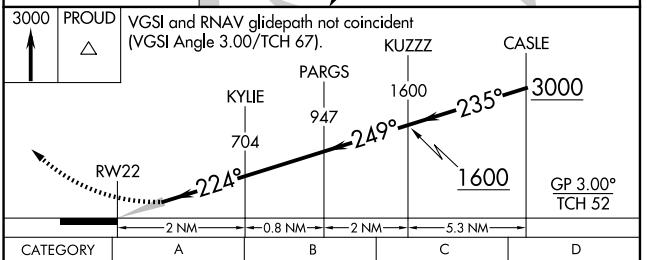

CATEGORY	A	B	C	D
RNP 0.30 DA*		384/35	372 (400-⅝)	
RNP 0.30 DA		445/40	433 (500-¾)	

AUTHORIZATION REQUIRED

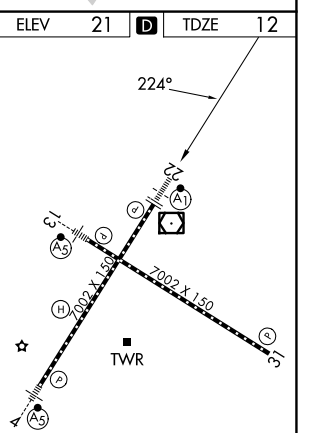

HIRL Rwys 4-22 and 13-31
REIL Rwy 31
TDZ/CL Rwys 4, 13, and 22

NE-2, 16 APR 2026 to 14 MAY 2026