

LOC/DME I-PDP 108.95 Chan 26 (Y)	APP CRS 268°	Rwy Ldg TDZE Apt Elev	27R 8864 11 36	27L 9912 10 36
---	------------------------	-----------------------------	--	--

ILS or LOC RWY 27R



PHILADELPHIA INTL (PHL)

DME required.

▼ For inop ALS, increase S-LOC 27R Cat C/D visibility to 1 3/8 SM.
▲ **RVR 1800 authorized with the use of FD or AP or HUD to DA.

27R MALS ARD (AS)	27L MALS ARD (AS)	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on MXE VORTAC R-115 to MXE VORTAC and hold.
----------------------	----------------------	--

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

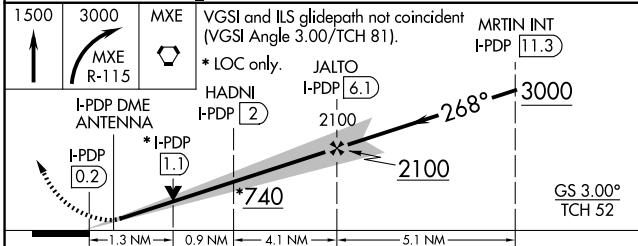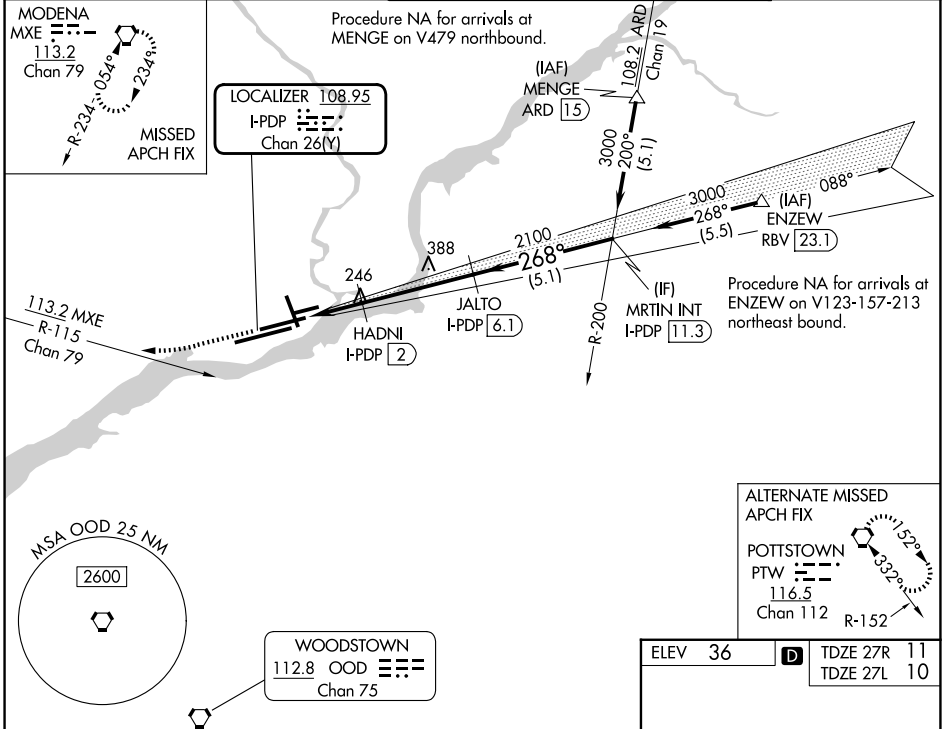

CATEGORY	A	B	C	D
S-ILS 27R **	211/24 200 (200-1/2)			
S-LOC 27R	500/24	489 (500-1/2)	500/50	489 (500-1)
SIDESTEP 27L	500-1	491 (500-1)	500-1 3/8	491 (500-1 3/8)
CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1 1/2 584 (600-1 1/2)	720-2 1/4 684 (700-2 1/4)

ELEV 36	TDZE 27R 11
	TDZE 27L 10

0.5% UP

500' X 150'

9500' X 150'

2000' X 200'

27R

268°

TWR

NE-4, 16 APR 2026 to 14 MAY 2026

NE-4, 16 APR 2026 to 14 MAY 2026