


|  |                        |  |
|--|------------------------|--|
| LOC/DME I-ROW<br><b>109.9</b><br>Chan 36 | APP CRS<br><b>215°</b> | Rwy Ldg <b>13000</b><br>TDZE <b>3633</b><br>Apt Elev <b>3671</b> |
|--|------------------------|--|

# I LS Z or LOC Z RWY 21



ROSWELL AIR CENTER (ROW)

|   |              |   |
|---|--------------|---|
| ADF or DME required.  | MALSR<br>ASR | MISSED APPROACH: Climb to 5000 then climbing right turn to 6000 on CME VORTAC R-195 to CME VORTAC and hold, continue climb-in-hold to 6000. |
| VDP NA when using Artesia altimeter setting. When local altimeter setting not received, use Artesia altimeter setting: increase DA to 3913 feet; increase all MDAs 80 feet and S-LOC 21 visibility Cat C/D 3/4 SM and Circling visibility Cat D 1/4 SM. For inop ALS when using Artesia altimeter setting, increase ILS all Cats visibility to 3/4 SM and LOC Cats C/D to 1 3/4 SM. |              |   |

|                             |  |   |                               |                                   |                         |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|
| ATIS<br><b>128.45 306.2</b> | ROSWELL APP CON*<br><b>119.6 239.0</b> | ROSWELL TOWER*<br><b>118.5 (CTAF) 0 233.7</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>132.875 282.25</b> | UNICOM<br><b>122.95</b> |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|

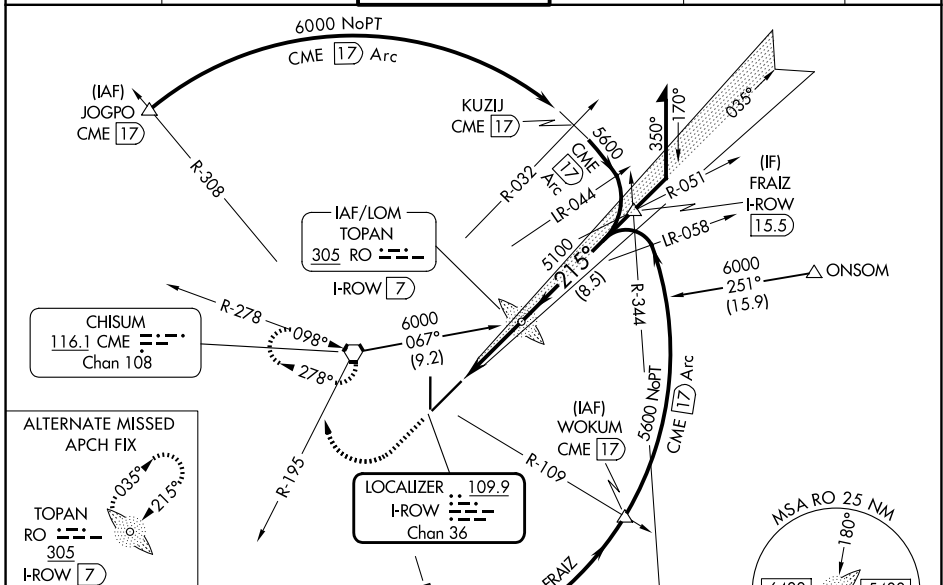

|           |          |           |
|-----------|----------|-----------|
| ELEV 3671 | <b>D</b> | TDZE 3633 |
|-----------|----------|-----------|

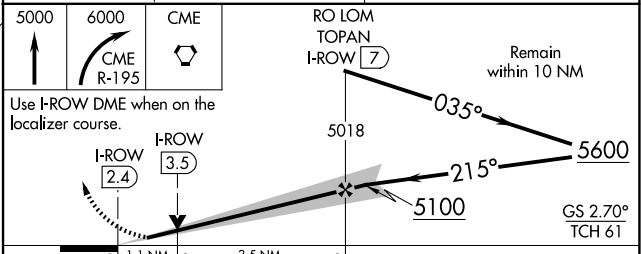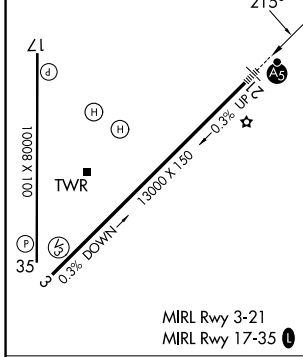

| CATEGORY | A                      | B             | C          | D                     |
|----------|------------------------|---------------|------------|-----------------------|
| S-ILS 21 | 3833-1/2 200 (200-1/2) |               |            |                       |
| S-LOC 21 | 4020-1/2               | 387 (400-1/2) | 4020-5/8   | 387 (400-5/8)         |
| CIRCLING | 4140-1                 | 469 (500-1)   | 4140-1 1/2 | 4300-2<br>629 (700-2) |

|         |      |      |      |      |
|---------|------|------|------|------|
| Knots   |      |      |      |      |
| 60      | 90   | 120  | 150  | 180  |
| Min:Sec |      |      |      |      |
| 4:36    | 3:04 | 2:18 | 1:50 | 1:32 |

SW-1, 16 APR 2026 to 14 MAY 2026

SW-1, 16 APR 2026 to 14 MAY 2026