

WAAS CH 70402 W35A	APP CRS 350°	Rwy Ldg 10008 TDZE 3671 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 35



ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting; increase LPV DA to 4001 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4033 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM, and Circling Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct HOGIG and hold.

ATIS 128.45 306.2	ROSWELL APP CON * 119.6 239.0	ROSWELL TOWER * 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

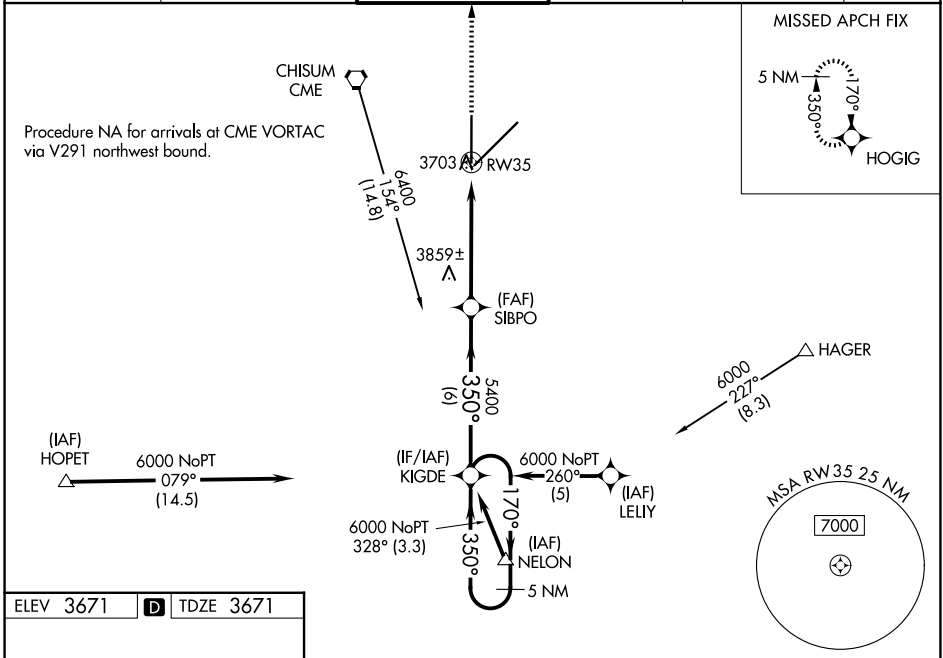

ELEV 3671	D	TDZE 3671
-----------	----------	-----------

10000 X 100

13000 X 150


0.3% UP

0.3% DOWN

350°

MIRL Rwy 3-21

MIRL Rwy 17-35

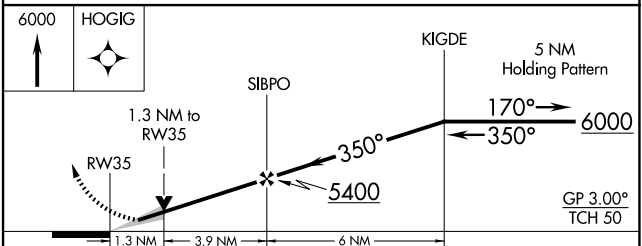

CATEGORY	A	B	C	D
LPV DA	3921-3/4 250 (300-3/4)			
LNAV/VNAV DA	3953-1 282 (300-1)			
LNAV MDA	4120-1	449 (500-1)	4120-1 1/4 449 (500-1 1/4)	4120-1 1/2 449 (500-1 1/2)
CIRCLING	4140-1	469 (500-1)	4140-1 1/2 469 (500-1 1/2)	4300-2 629 (700-2)

SW-1, 16 APR 2026 to 14 MAY 2026

SW-1, 16 APR 2026 to 14 MAY 2026