


LOC/DME I-LMR 109.7 Chan 34	APP CRS 123°	Rwy Ldg 12R 10553 12L 8956 TDZE 540 541 Apt Elev 617 617
---	------------------------	--

ILS or LOC RWY 12R


ST LOUIS LAMBERT INTL (STL)

▼ LOC only: Rwy 12R helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to sidestep Rwy 12L. For inop ALS, increase S-ILS 12R Cat E visibility to RVR 4000 and increase S-LOC 12R Cats A/B visibility to RVR 5500, Cats C/D/E visibility to RVR 6000. Simultaneous approach authorized with Rwy 11. Simultaneous approach authorized with Rwy 12L requires use of vertical guidance, maintain last assigned altitude until established on glide slope.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 118.5 257.7	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---------------------------------------	---	--------------------------------	-------

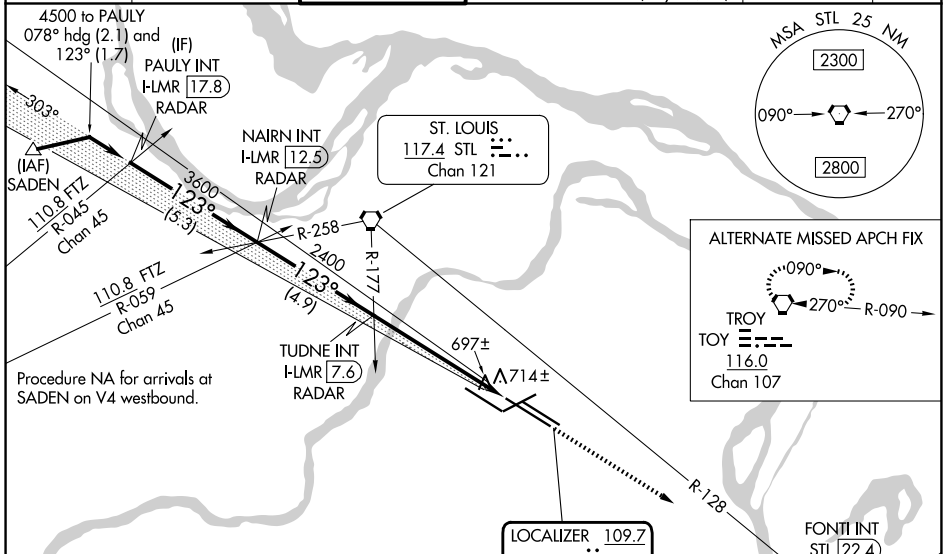


ELEV 617	D TDZE 12R 540 TDZE 12L 541
----------	---------------------------------------



Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150

HIRL all Rwy's
TDZ/CL Rwy's 11, 12L, 12R, 29, and 30R
FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

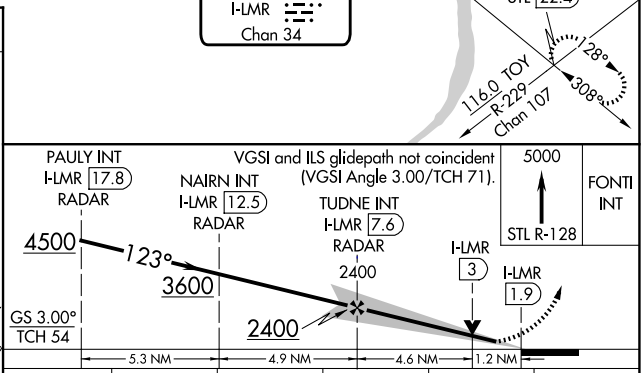

CATEGORY	A	B	C	D	E
S-ILS 12R	740/18 200 (200-½)				
S-LOC 12R	960/40 420 (400-¾)				
SIDESTEP 12L	980-1 439 (400-1)	980-1½ 439 (400-1½)	980-2 439 (400-2)		

NC-3, 16 APR 2026 to 14 MAY 2026

NC-3, 16 APR 2026 to 14 MAY 2026