



LOC/DME I-UAT <b>111.9</b> Chan <b>56</b>	APP CRS <b>164°</b>	Rwy Ldg <b>12000</b> TDZE <b>4226</b> Apt Elev <b>4231</b>
---	------------------------	--

# ILS or LOC RWY 16R

SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. From EKKHO or WEBER.		ALSIF-2 	MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 on heading 310° and on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold.
DME or RADAR required.			
<p>Simultaneous approach authorized. For inop ALS, increase S-LOC 16R Cat A and B visibilities to RVR 5500, and Cat C and D visibilities to 1½ SM.</p>			

D-ATIS <b>124.75 125.625</b>	SALT LAKE CITY APP CON <b>125.7 284.6</b>	SALT LAKE CITY TOWER <b>132.65 336.4</b>	GND CON <b>123.775 348.6</b>	CLNC DEL <b>127.3 379.975</b>	CPDLC
---------------------------------	--	---	---------------------------------	----------------------------------	-------

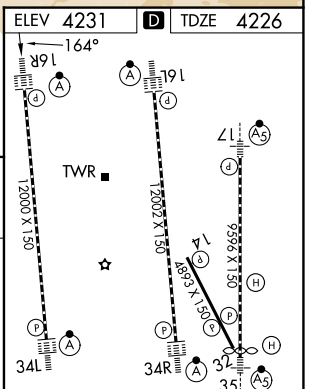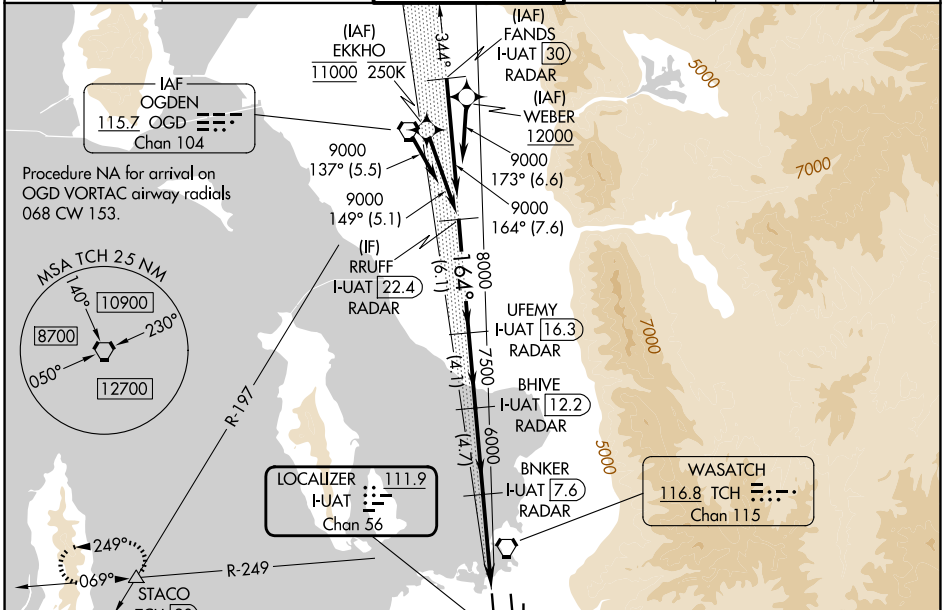

RRUFF I-UAT 22.4 RADAR	UFEMY I-UAT 16.3 RADAR	BHIVE I-UAT 12.2 RADAR	BNKER I-UAT 7.6 RADAR	I-UAT 3.3	I-UAT 2.1
9000	8000	7500	6000		
GS 3.00° TCH 54					
6.1 NM    4.1 NM    4.7 NM    4.2 NM    1.2 NM					

HIRL all Rwys  
TDZ/CL Rwys 16L, 16R, 17, 34L, 34R, and 35

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

CATEGORY	A	B	C	D
S-ILS 16R	4426/18		200 (200-½)	
S-LOC 16R	4680/24	454 (500-½)	4680/45	454 (500-¾)

SW-4, 16 APR 2026 to 14 MAY 2026

SW-4, 16 APR 2026 to 14 MAY 2026