


|  |                        |   |
|--|------------------------|---|
| LOC/DME I-OJW<br><b>108.3</b><br>Chan 20 | APP CRS<br><b>183°</b> | Rwy Ldg<br>TDZE <b>54</b><br>Apt Elev <b>56</b> |
|--|------------------------|---|

# LDA RWY 20R



JOHN WAYNE/ORANGE COUNTY (SNA)

|  |             |   |
|--|-------------|---|
| DME required.  | MALSR<br>AS | MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct SLI VORTAC and hold. |
| ▼ Circling Rwy 20L NA at night. For inop ALS, increase S-LDA 20R Cat C/D visibility to RVR 6000. |             |   |

|                        |                                     |   |                         |                         |
|------------------------|-------------------------------------|---|-------------------------|-------------------------|
| D-ATIS<br><b>126.0</b> | SOCAL APP CON<br><b>121.3 263.1</b> | JOHN WAYNE TOWER *<br><b>126.8 (CTAF) 0 343.625</b> | GND CON<br><b>120.8</b> | UNICOM<br><b>122.95</b> |
|------------------------|-------------------------------------|---|-------------------------|-------------------------|

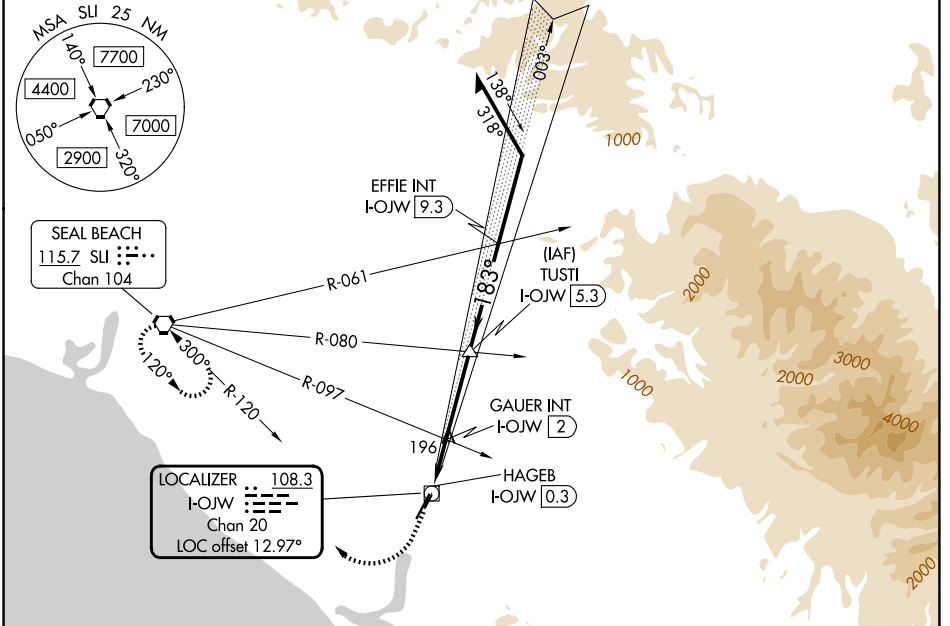

|         |          |         |
|---------|----------|---------|
| ELEV 56 | <b>D</b> | TDZE 54 |
|---------|----------|---------|

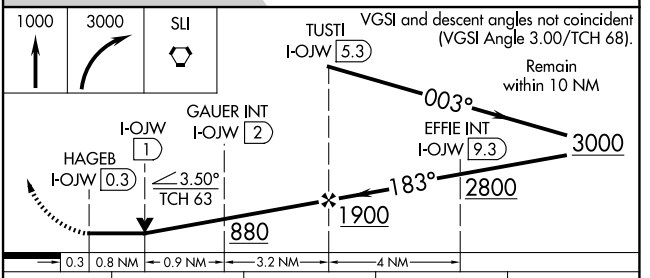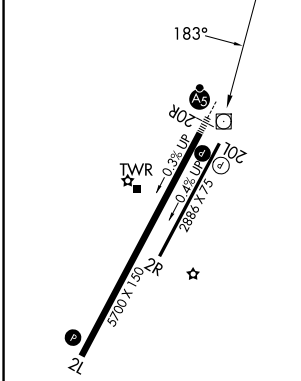

| CATEGORY  | A      | B           | C                      | D                       |
|-----------|--------|-------------|------------------------|-------------------------|
| S-LDA 20R | 460/24 | 406 (500-½) | 460/40                 | 406 (500-¾)             |
| CIRCLING  | 640-1  | 584 (600-1) | 840-2¼<br>784 (800-2¼) | 1180-3<br>1124 (1200-3) |

REIL Rwy 20L  
MIRL Rwy 2R-20L  
HIRL Rwy 2L-20R

SW-3, 16 APR 2026 to 14 MAY 2026

SW-3, 16 APR 2026 to 14 MAY 2026