

LOC/DME I-SMX <b>108.9</b> Chan 26	APP CRS <b>120°</b>	Rwy Ldg <b>8004</b>
		TDZE <b>230</b>
		Apt Elev <b>261</b>

# ILS or LOC RWY 12


SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

**⚠** Night Landing: Rwy 2 NA. VDP NA when using San Luis Obispo altimeter setting. When local altimeter setting not received, use San Luis Obispo altimeter setting and increase DA to 489 feet; increase all MDA 60 feet and S-LOC visibility Cat C and D to RVR 5500. For inop MALS, increase S-LOC 12 Cat C/D visibility to 1 1/8 mile.  
# RVR 1800 authorized with use of FD or AP or HUD to DA; NA when using San Luis Obispo altimeter setting.

**MALS**  
AS

**MISSED APPROACH:**  
Climb to 800, then climbing left turn to 5000 direct MQO VORTAC and hold.

ATIS <b>121.15</b>	SANTA BARBARA APP CON * <b>124.15 327.8</b>	SANTA MARIA TOWER * <b>118.3 (CTAF) 239.25</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
-----------------------	--	---	-------------------------	-------------------------

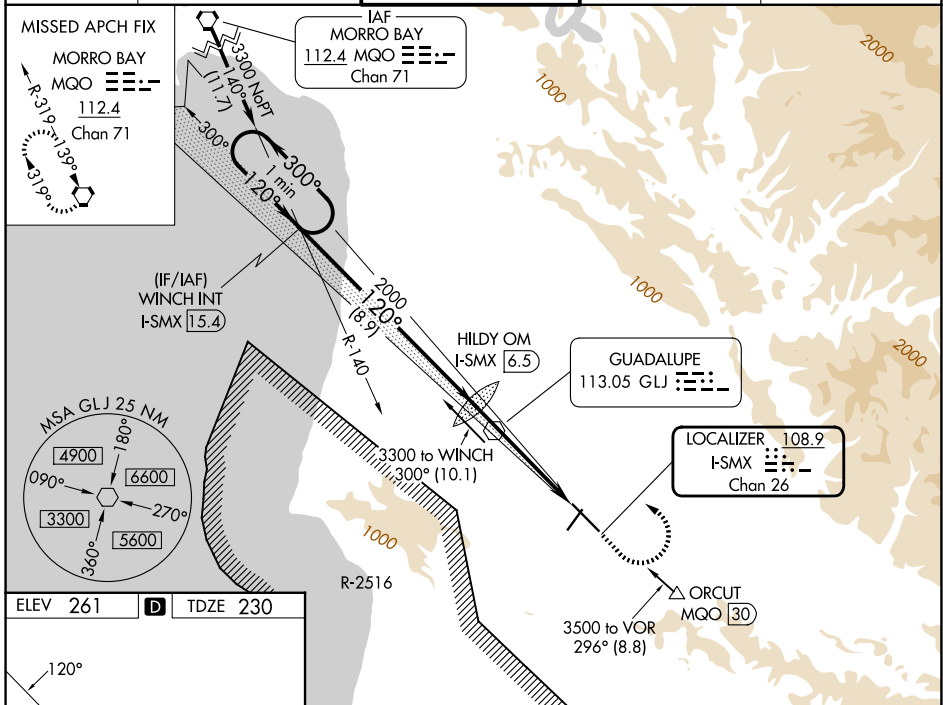

ELEV 261	<b>D</b>	TDZE 230
----------	----------	----------

HIRL Rwy 12-30

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

	WINCH I-SMX 15.4	HILDY OM I-SMX 6.5	800	5000	MQO
	One Minute Holding Pattern		↑	↶	⬡
	3300	1886			*LOC only.
	← 300°	← 120°	← 120°		
	GS 3.00° TCH 55	2000			
		8.9 NM	3.8 NM	1.2 NM	
CATEGORY	A	B	C	D	
S-ILS 12#	430/24 200 (200-1/2)				
S-LOC 12	680/24	450 (500-1/2)	680/50	450 (500-1)	
CIRCLING	860-1 599 (600-1)	1000-1 739 (800-1)	1420-3 1159 (1200-3)	1520-3 1259 (1300-3)	

SW-3, 16 APR 2026 to 14 MAY 2026

SW-3, 16 APR 2026 to 14 MAY 2026