

WAAS CH 97722	APP CRS 030°	Rwy Ldg TDZE Apt Elev	8999 1424 1430
-------------------------	------------------------	-----------------------------	---

RNAV (GPS) RWY 3

JOE FOSS FLD (FSD)



RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to 1 3/4 SM.
 ASR -30°C


MALSRL

MISSED APPROACH: Climb to 4000 direct MOEUE and hold.

ATIS 126.6	SIoux FALLS APP CON* 125.8 284.725	SIoux FALLS TOWER* 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--	---	-------------------------------	-------------------------

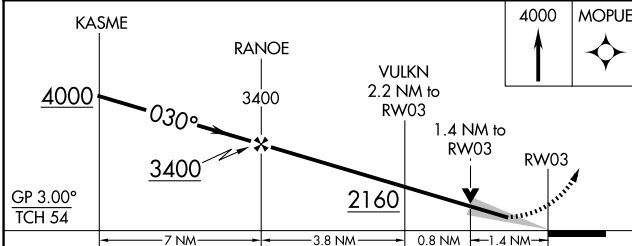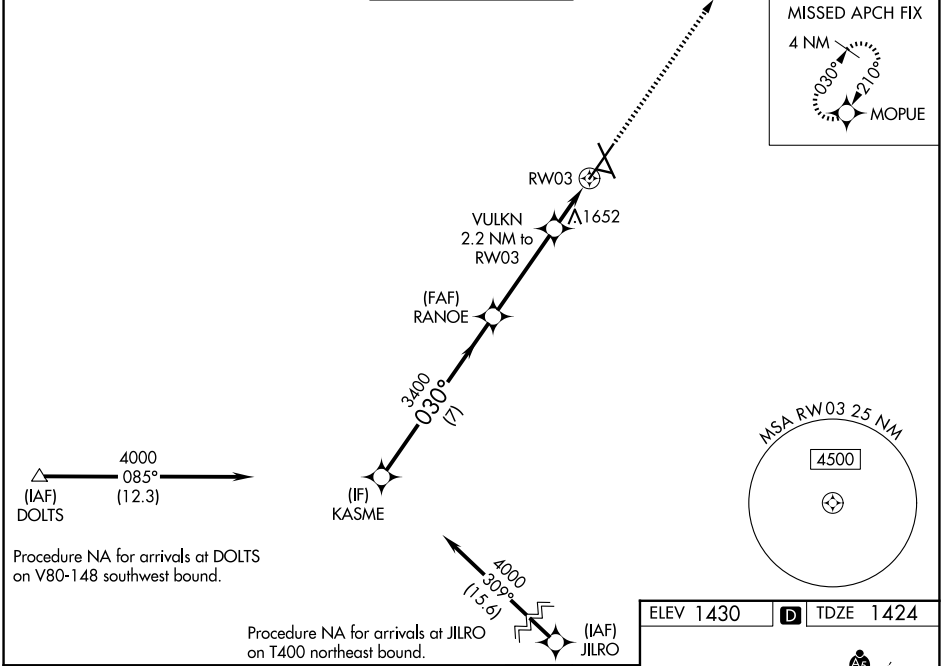

CATEGORY	A	B	C	D
LPV DA	1674/24		250 (300-1/2)	
LNAV/VNAV DA	1741/24		317 (400-1/2)	
LNAV MDA	1920/24	496 (500-1/2)	1920/50	496 (500-1)
CIRCLING	1980-1	550 (600-1)	2060-1 3/4 630 (700-1 3/4)	2200-2 1/2 770 (800-2 1/2)

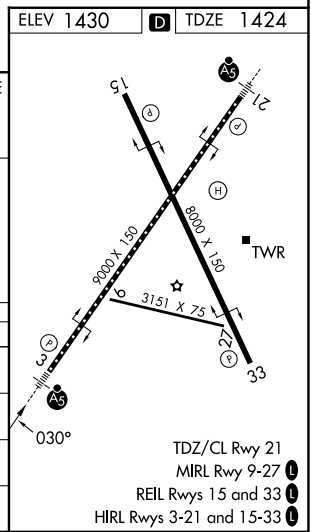

NC-1, 16 APR 2026 to 14 MAY 2026

NC-1, 16 APR 2026 to 14 MAY 2026