



FORT LEWIS, WASHINGTON

ILS or LOC RWY 15

| | | | | |
|--------------------------------------|-------------------------|--|-------|---|
| LOC I-GRF 108.3 Chan 20 | APCH CRS 151° | Rwy Idg TDZE Arprt Elev 6124 300 301 | [USA] | GRAY AAF (JOINT BASE LEWIS MCCORD) (KGRF) |
|--------------------------------------|-------------------------|--|-------|---|


RNAV1 - GPS from SEA VORTAC.
 DME required for civil use. For non-RNAV aircraft, RADAR required from SEA VORTAC.
 * When ALS inop when using McChord AFB altimeter setting, increase LOC CAT C/D vis to RVR 55.
 MISSED APPROACH: Climb to 1000, then climbing left turn to 3000 on hdg 270° and OLM VORTAC R-014, then continue climb to 4000 on OLM R-014 to OLM and hold.

| | | | | |
|-----------------------------|---------------------------------------|--|-------------------------------|--------------------------------|
| ATIS 124.65 306.2 | SEATTLE APP CON 120.1 290.9 | TOWER ★ 119.325 (CTAF) 256.8 | GND CON 121.9 290.2 | CLNC DEL 121.9 290.2 |
|-----------------------------|---------------------------------------|--|-------------------------------|--------------------------------|

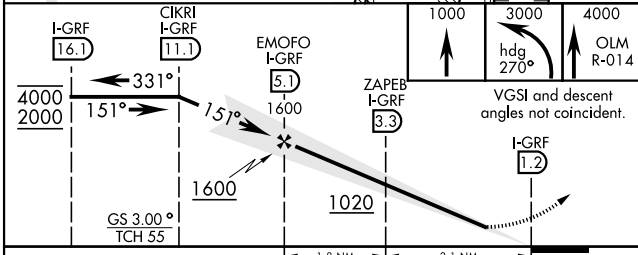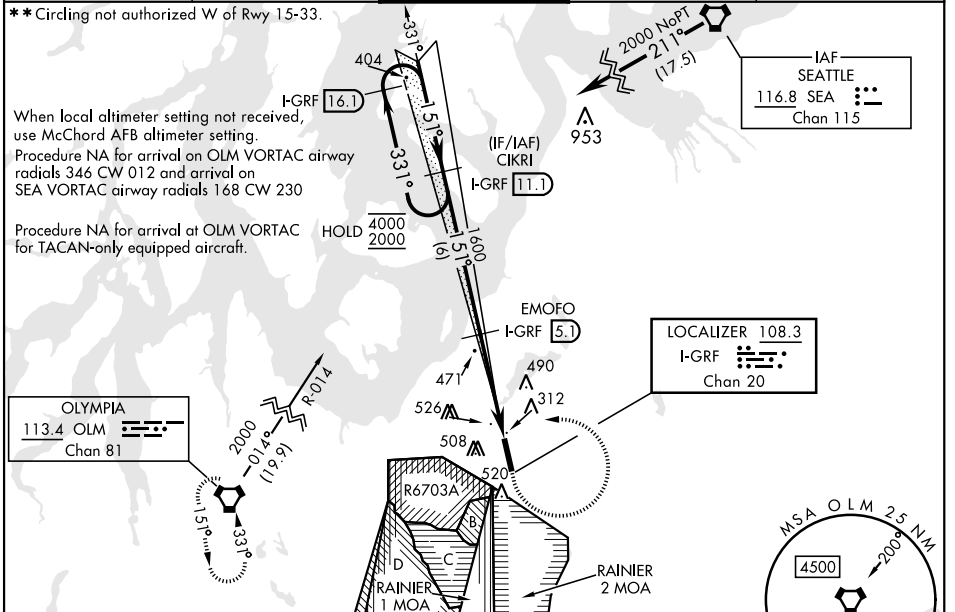

| | |
|----------|----------|
| ELEV 301 | TDZE 300 |
|----------|----------|

| CATEGORY | A | B | C | D |
|--|--------|-------------|------------------------|----------------------|
| S-ILS 15 | 500/24 | | 200 | (200-½) |
| S-LOC 15 | 640/24 | 340 (400-½) | 640/26 | 340 (400-½) |
| CIRCLING ** | 840-1 | 539 (600-1) | 840-1½ 539 (600-1½) | 920-2 619 (700-2) |
| McCHORD FLD ALTIMETER SETTING MINIMUMS | | | | |
| S-ILS 15 | 516/24 | | 216 | (300-½) |
| S-LOC 15* | 660/24 | 360 (400-½) | 660/35 | 360 (400-¾) |
| CIRCLING ** | 860-1 | 559 (600-1) | 860-1½ 559 (600-1½) | 940-2 639 (700-2) |

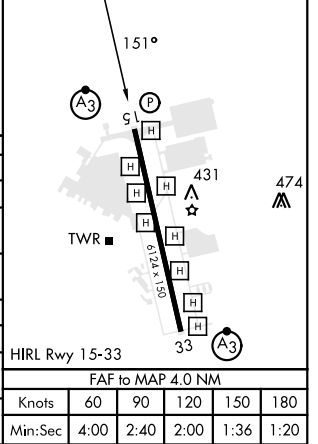

FORT LEWIS, WASHINGTON 47°05'N-122°35'W GRAY AAF (JOINT BASE LEWIS MCCORD) (KGRF)

Amdt 8A 05DEC19

ILS or LOC RWY 15

NW-1, 16 APR 2026 to 14 MAY 2026

NW-1, 16 APR 2026 to 14 MAY 2026