

WAAS CH 81918 W22A	APP CRS 221°	Rwy Ldg TDZE Apt Elev	6498 164 170
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 22

TUSCALOOSA NTL (TCL)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Birmingham altimeter setting: increase LPV DA to 760 feet and all visibilities 1/2 SM; increase LNAV/VNAV DA to 937 feet and all visibilities 3/4 SM; increase all MDAs 180 feet and visibility LNAV Cats C and D 1/2 SM and Circling Cat C 3/4 SM and Cat D 1/2 SM. Baro-VNAV and VDP NA when using Birmingham altimeter setting. Circling Rwy 12, 30 NA at night.

MISSED APPROACH: Climb to 2500 direct ROBND and left turn on track 131° to MOVIL and on 050° track to OKW VORTAC and hold.

ASOS 132.825	BIRMINGHAM APP CON 120.15 269.25	TUSCALOOSA TOWER ★ 126.3 (CTAF) 0 256.7	GND CON 121.8 257.95	UNICOM 122.95
------------------------	--	---	--------------------------------	-------------------------

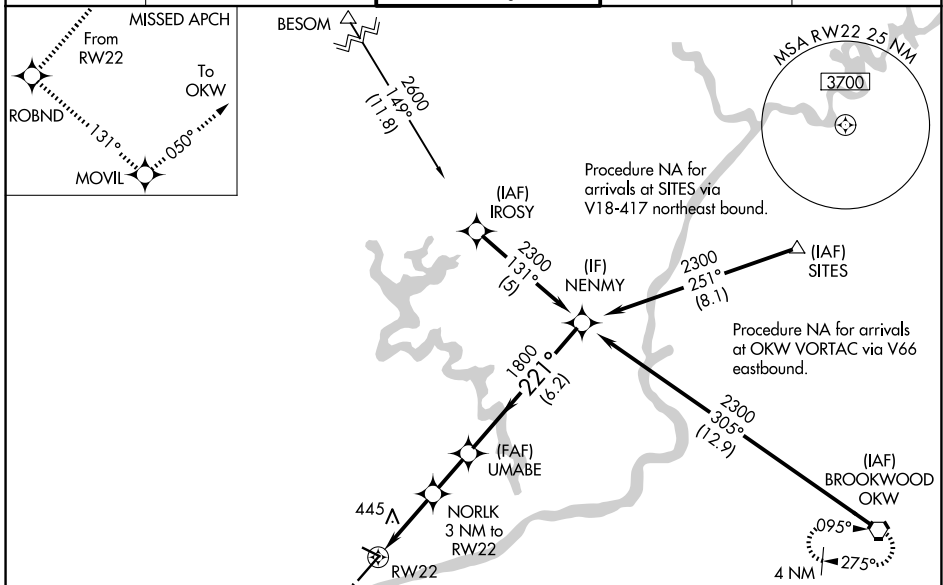

ELEV 170	TDZE 164
----------	----------

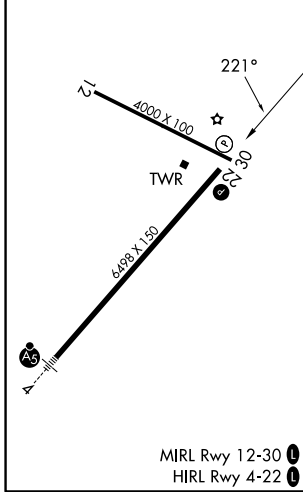

2500	ROBND	MOVIL	OKW	tr 131°	tr 050°	GP 3.00° TCH 60
*LNAV only.						Procedure Turn NA
NORLK 3 NM to RWY 22		UMABE 1800		2300		
1.5 NM to RWY 22		1160		1800		
1.5		1.5		1.9 NM		6.2 NM
CATEGORY	A		B	C	D	
LPV DA	582-1 1/2		418 (500-1 1/2)			
LNAV/VNAV DA	759-2		595 (600-2)			
LNAV MDA	700-1 536 (600-1)		700-1 1/2 536 (600-1 1/2)		700-1 3/4 536 (600-1 3/4)	
CIRCLING	720-1 550 (600-1)		800-1 630 (700-1)		960-2 1/4 960-2 1/2 790 (800-2 1/4) 790 (800-2 1/2)	

SE-4, 16 APR 2026 to 14 MAY 2026

SE-4, 16 APR 2026 to 14 MAY 2026