

WAAS CH 82313 W36B	APP CRS 005°	Rwy Ldg 11621 TDZE 93 Apt Elev 96
--	------------------------	--

RNAV (GPS) Y RWY 36L




ORLANDO INTL (MCO)

RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C.
Use of FD or AP required during simultaneous operations.

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct DNMOR and hold, continue climb-in-hold to 3000.

D-ATIS 121.25	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	GND CON 126.4 (E) 121.8 (W)
-------------------------	---------------------------------------	--	---

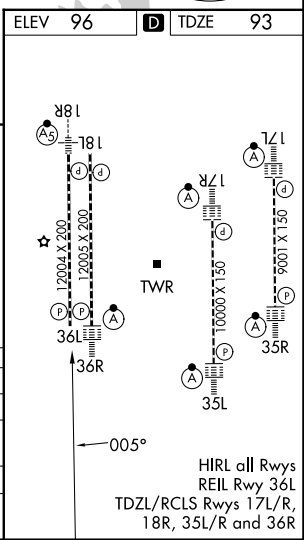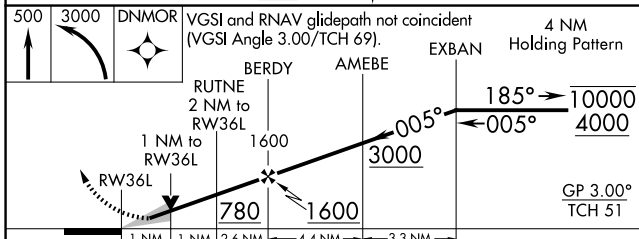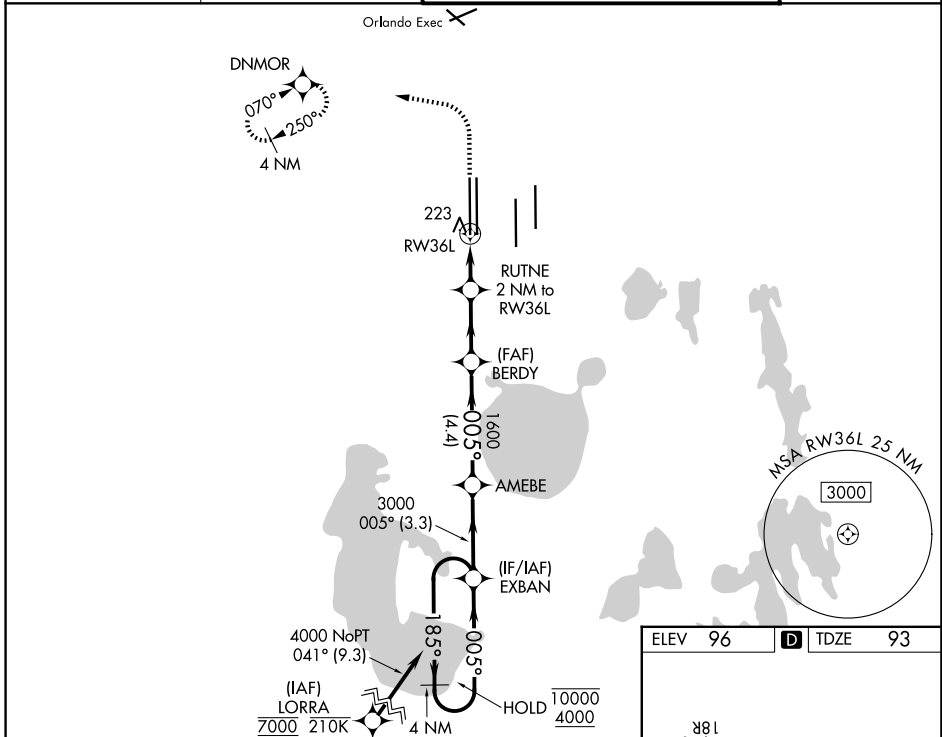

CATEGORY	A	B	C	D
LPV DA		293/40	200 (200-¾)	
LNAV/VNAV DA		406/45	313 (400-¾)	
LNAV MDA	480/55	387 (400-1)	480/60	387 (400-1½)
CIRCLING	740-1	644 (700-1)	740-1¾ 644 (700-1¾)	740-2 644 (700-2)

SE-3, 16 APR 2026 to 14 MAY 2026

SE-3, 16 APR 2026 to 14 MAY 2026