LOC I-GZX	APP CRS	Rwy Ldg	9604
109.9	129°	TDZE	632
		Apt Elev	661

ILS or LOC RWY 13

GENERAL DOWNING - PEORIA INTL (PIA)

ADF required. DME required for procedure entry at GREGG.

Circling Rwy 13, 31 NA at night. When local altimeter setting not received, use AAA altimeter setting and increase S-ILS* 13 DA to 921 feet; increase all MDAs 100 feet; and Circling visibility Cat C/D ½ SM. For inop ALS when using AAA altimeter setting, increase S-ILS 13* all Cats visibility to RVR 4500.
* RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2500 direct TUNGG LOM and hold, continue climb-in-hold to 2500.

ATIS	SAINT LOUIS APP CON	PEORIA TOWER	GND CON	CLNC DEL
126.1 282.2	125.8 269.2	124.0 353.85	121.85 348.6	124.675 317.55

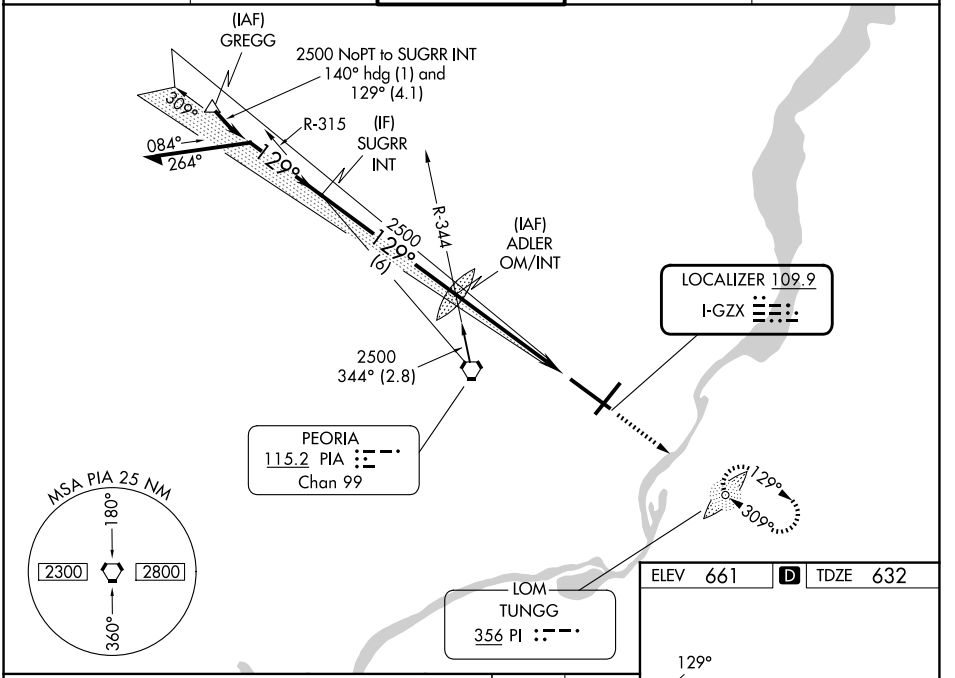

CATEGORY	A	B	C	D
S-ILS 13 *	832/24		200 (200-½)	
S-LOC 13	1180/24	548 (600-½)	1180/60	548 (600-1¼)
CIRCLING	1180-1	519 (600-1)	1180-1⅝ 519 (600-1⅝)	1400-2¼ 739 (800-2¼)

HIRL Rwys 4-22 and 13-31

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

EC-3, 16 APR 2026 to 14 MAY 2026
EC-3, 16 APR 2026 to 14 MAY 2026