

RNAV (GPS) X RWY 22L

JOHN F KENNEDY INTL (JFK)

APP CRS 234°	Rwy Ldg TDZE Apt Elev	8400 12 13
------------------------	-----------------------------	---------------------------------------

RNP APCH - GPS.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

ALSF-2



MISSED APPROACH: Climbing left turn to 3000 direct CHANT and hold.



(SW)	D-ATIS (NE)	NEW YORK APP CON	KENNEDY TOWER		GND CON
115.4	117.7 128.725	128.125 269.0	119.1 281.55	123.9 281.55	121.9 348.6
			(4R/22L and 13L/31R) (4L/22R and 13R/31L)		

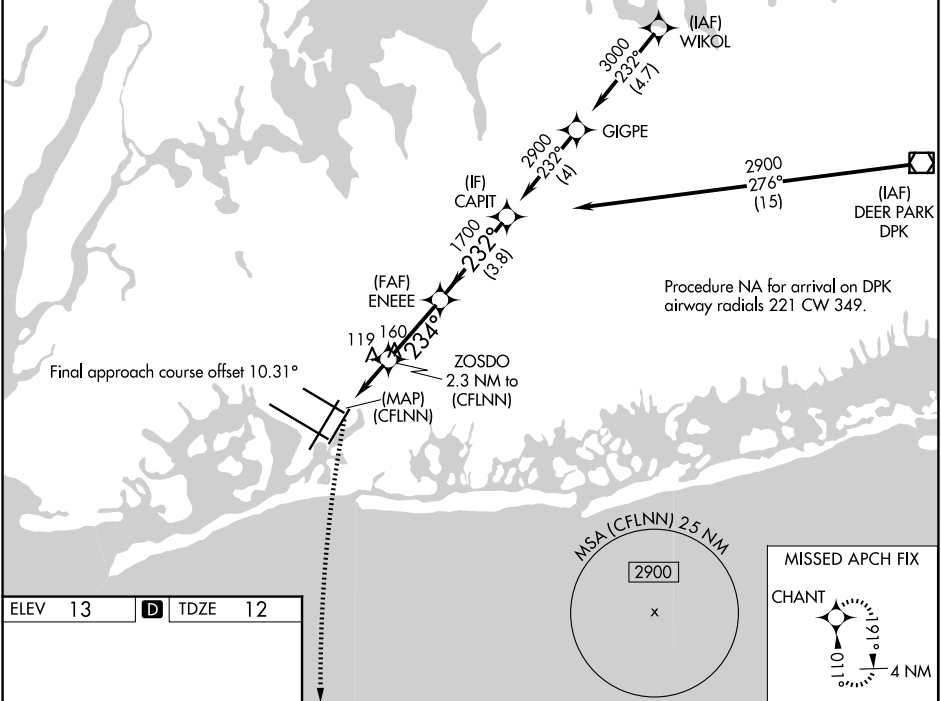

NE-2, 16 APR 2026 to 14 MAY 2026

NE-2, 16 APR 2026 to 14 MAY 2026

ELEV 13	D	TDZE 12
---------	----------	---------

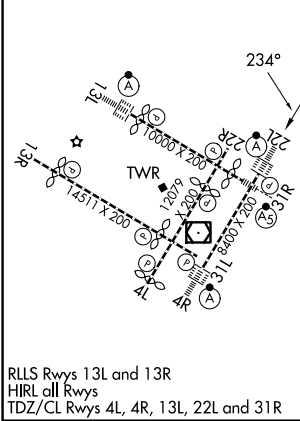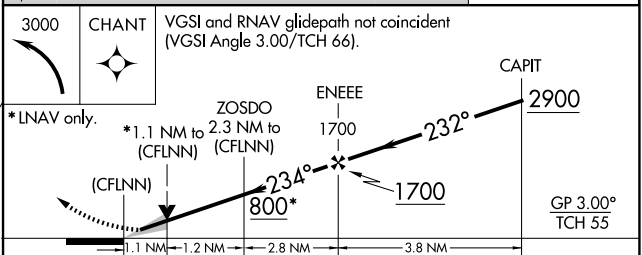

CATEGORY	A	B	C	D
LNAV/VNAV DA	413/40		401 (400-¾)	
LNAV MDA	440/24	428 (500-½)	440/40	428 (500-¾)
CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)