


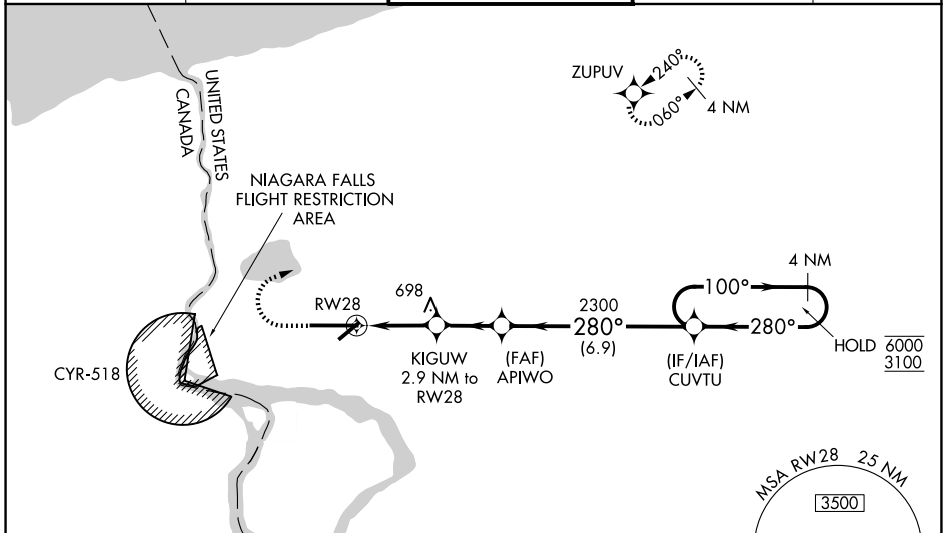
|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>63147</b><br><b>W28A</b> | APP CRS<br><b>280°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>9129</b><br><b>588</b><br><b>592</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 28


NIAGARA FALLS INTL (IAG)

|                 |  |  |  |
|-----------------|--|--|--|
| RNP APCH - GPS. | <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.<br/>                 ▲ Rwy 28 helicopter visibility reduction below RVR 4000 not authorized.<br/>                 Circling Rwy 6 NA at night.<br/>                 Circling NA for Cat E southeast of Rwy 6-24.<br/>                 Inop table does not apply to LPV all Cats.<br/>                 For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 4500, LNAV visibility all Cats to RVR 5500.</p> | <p>MALSRL<br/> </p> | <p>MISSED APPROACH:<br/>                 Climb to 1040 then climbing right turn to 3600 direct ZUPOV and hold, continue climb-in-hold to 3600.</p> |
|-----------------|--|--|--|

|                            |                                       |  |                               |                         |
|----------------------------|---------------------------------------|--|-------------------------------|-------------------------|
| ATIS<br><b>120.8 269.4</b> | BUFFALO APP CON<br><b>126.5 317.6</b> | NIAGARA TOWER ★<br><b>118.5 (CTAF) 0 349.0</b> | GND CON<br><b>125.3 275.8</b> | UNICOM<br><b>122.95</b> |
|----------------------------|---------------------------------------|--|-------------------------------|-------------------------|



|          |          |          |
|----------|----------|----------|
| ELEV 592 | <b>D</b> | TDZE 588 |
|----------|----------|----------|

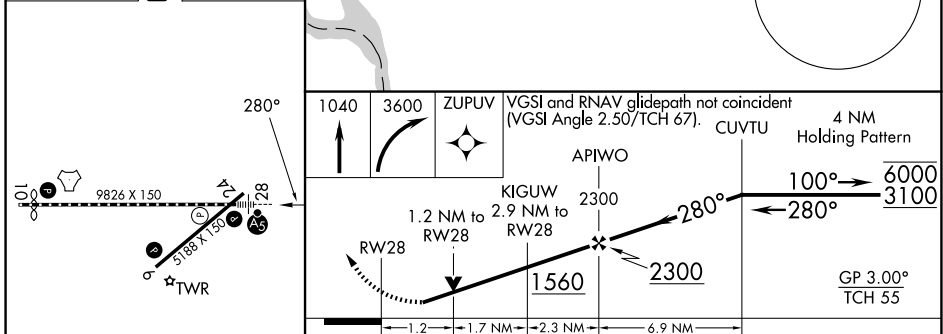

| CATEGORY     | A      | B           | C                     | D                       | E                       |
|--------------|--------|-------------|-----------------------|-------------------------|-------------------------|
| LPV DA       |        | 838/40      | 250 (300-¾)           |                         |                         |
| LNAV/VNAV DA |        | 957/40      | 369 (400-¾)           |                         |                         |
| LNAV MDA     |        | 960/40      | 372 (400-¾)           |                         |                         |
| CIRCLING     | 1100-1 | 508 (600-1) | 1280-2<br>688 (700-2) | 1280-2¼<br>688 (700-2¼) | 1280-2½<br>688 (700-2½) |

NE-2, 16 APR 2026 to 14 MAY 2026

NE-2, 16 APR 2026 to 14 MAY 2026