

WAAS CH 45714 W09A	APP CRS 094°	Rwy Ldg 7201 TDZE 771 Apt Elev 782
--------------------------	-----------------	---------------------------------------------------

# RNAV (GPS) RWY 9

BISHOP INTL (F'NT)




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cat C/D visibility to 1 $\frac{1}{8}$  SM.  
\*\*RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 3000 direct JUBUG and on track 099° to KATY and hold.

ATIS 133.15	GREAT LAKES APP CON * 118.8 257.9	FLINT TOWER * 126.3 (CTAF) 0 257.9	GND CON 121.9	UNICOM 122.95
----------------	--------------------------------------	---------------------------------------	------------------	------------------

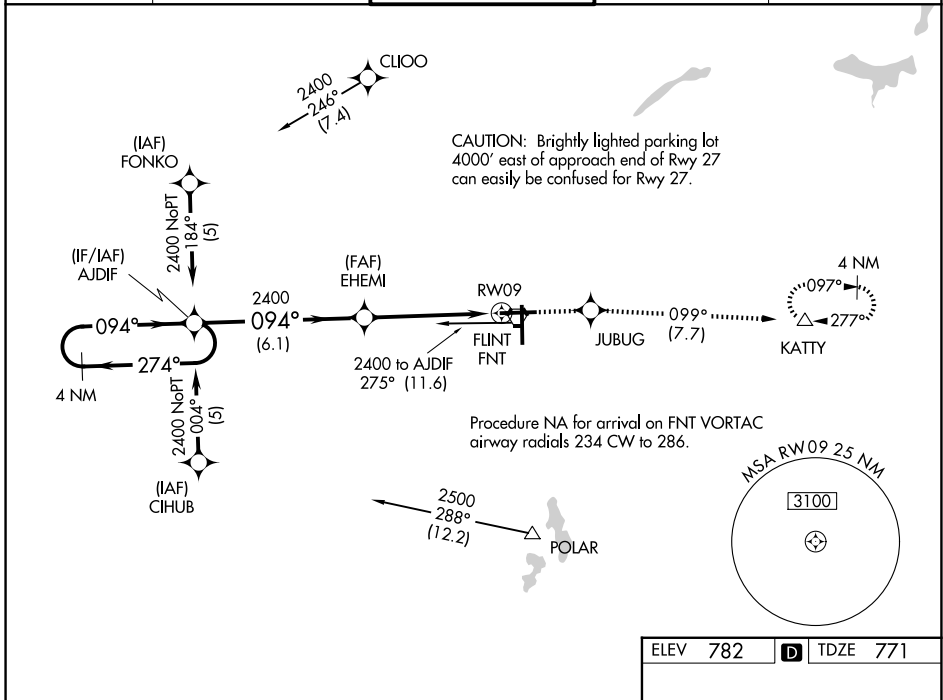

EC-1, 16 APR 2026 to 14 MAY 2026

EC-1, 16 APR 2026 to 14 MAY 2026

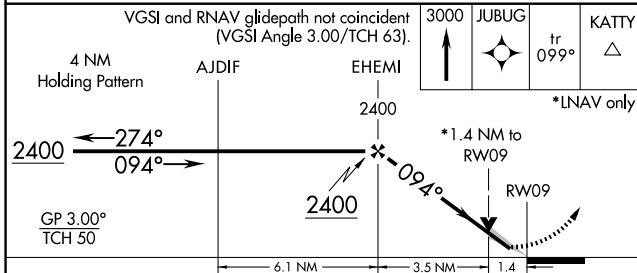

CATEGORY	A	B	C	D
LPV DA **		971/24	200 (200- $\frac{1}{2}$ )	
LNAV/ VNAV DA		1227/50	456 (500-1)	
LNAV MDA	1260/24	489 (500- $\frac{1}{2}$ )	1260/50	489 (500-1)
CIRCLING	1260-1 478 (500-1)	1300-1 518 (600-1)	1300-1 $\frac{1}{2}$ 518 (600-1 $\frac{1}{2}$ )	1520-2 $\frac{1}{4}$ 738 (800-2 $\frac{1}{4}$ )

