WAAS CH 56331 W04A	APP CRS 043°	Rwy Ldg 8748 / TDZE 37 / Apt Elev 40

RNAV (GPS) RWY 4

WALLOPS FLIGHT FACILITY (WAL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 342 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 510 and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct MAGGO and hold.

ASOS	PATUXENT APP CON★	WALLOPS TOWER★	GND CON
119.175	127.95 314.0	126.5 (CTAF) 306.975 (CTAF)	127.875 269.325

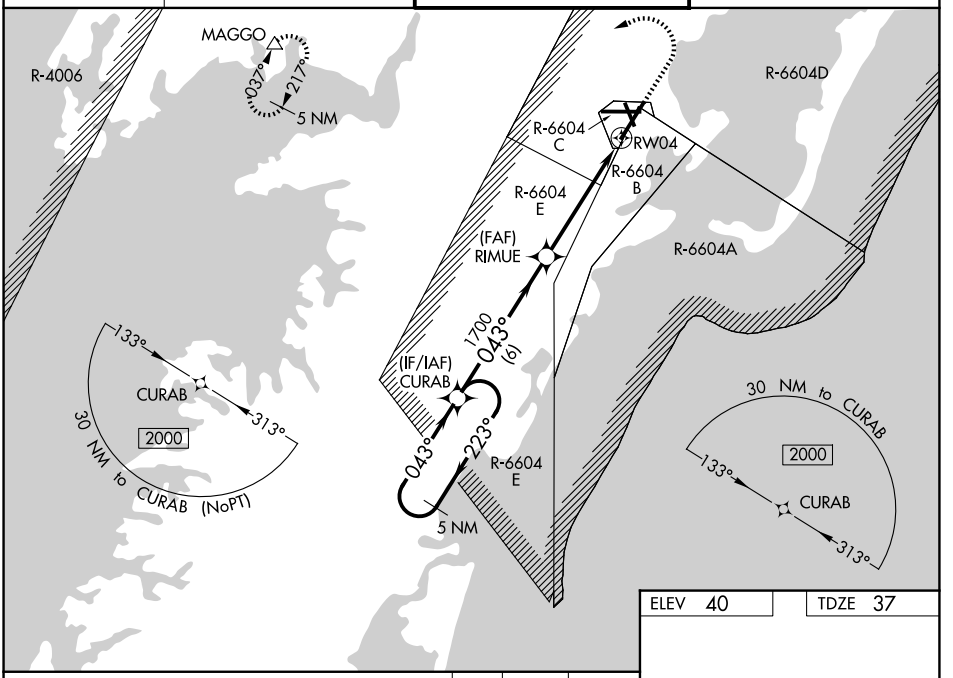

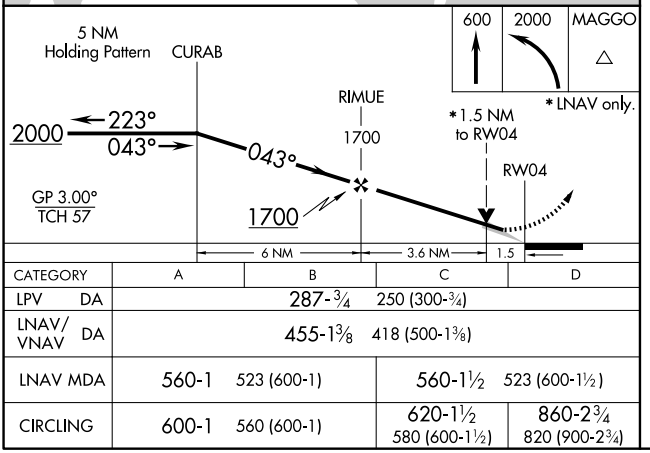

CATEGORY	A	B	C	D
LPV DA	287-¾	250 (300-¾)		
LNAV/VNAV DA	455-1⅜	418 (500-1⅜)		
LNAV MDA	560-1	523 (600-1)	560-1½	523 (600-1½)
CIRCLING	600-1	560 (600-1)	620-1½ 580 (600-1½)	860-2¾ 820 (900-2¾)

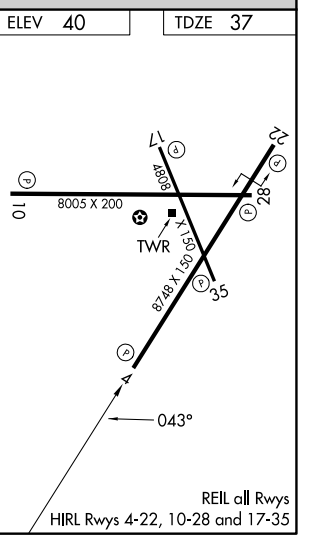

NE-3, 16 APR 2026 to 14 MAY 2026
NE-3, 16 APR 2026 to 14 MAY 2026