

WAAS CH 97431 W01A	APP CRS 013°	Rwy Ldg TDZE Apt Elev	9072 1180 1205
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1



MARQUETTE/SAWYER RGNL (SAW)

RNP APCH - GPS.



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.

MALSRL
MISSED APPROACH:
Climb to 3500 direct
ZUCTI and hold.

AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 1	GND CON 121.65	UNICOM 122.7
----------------------------	--	--	--------------------------	------------------------

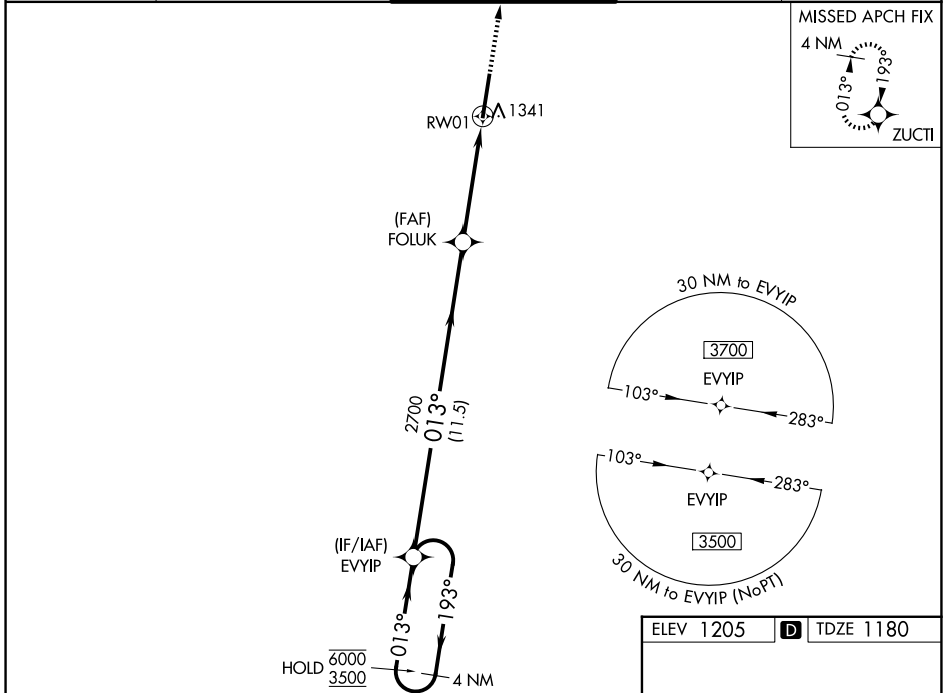

ELEV 1205	D TDZE 1180
-----------	--------------------

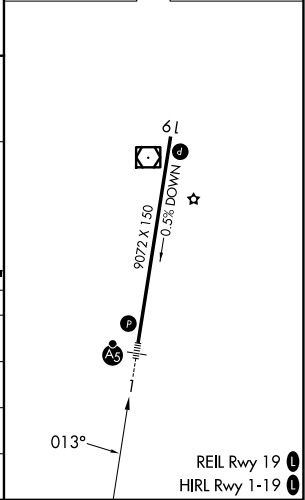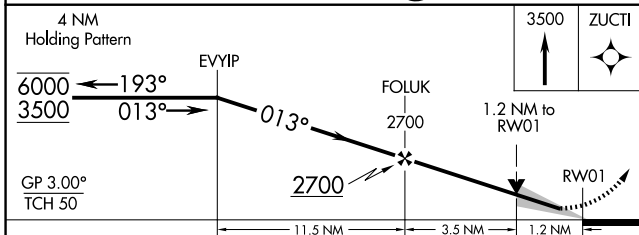

CATEGORY	A	B	C	D
LPV DA		1380-½	200 (200-½)	
LNAV/VNAV DA		1503-½	323 (300-½)	
LNAV MDA	1600-½	420 (400-½)	1600-¾	420 (400-¾)
CIRCLING	1680-1	475 (500-1)	1820-1¾ 615 (700-1¾)	1820-2 615 (700-2)