# RNAV (GPS) RWY 35

EASTERWOOD FLD (CLL)

| WAAS CH 63122 W35A | APP CRS 346° | Rwy Ldg 6932 / TDZE 311 / Apt Elev 321 |
|---|---|---|

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. For inop ALS, increase LPV Cat E visibility to ¾ SM, increase LNAV/VNAV all Cats visibility to ⅞ SM, increase LNAV Cat E visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2100 direct ZAKBU and hold.

| ATIS | HOUSTON APP CON | EASTERWOOD TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 126.85 | 134.3 360.85 | 118.5 (CTAF) L 284.7 | 128.7 284.7 | 122.95 |

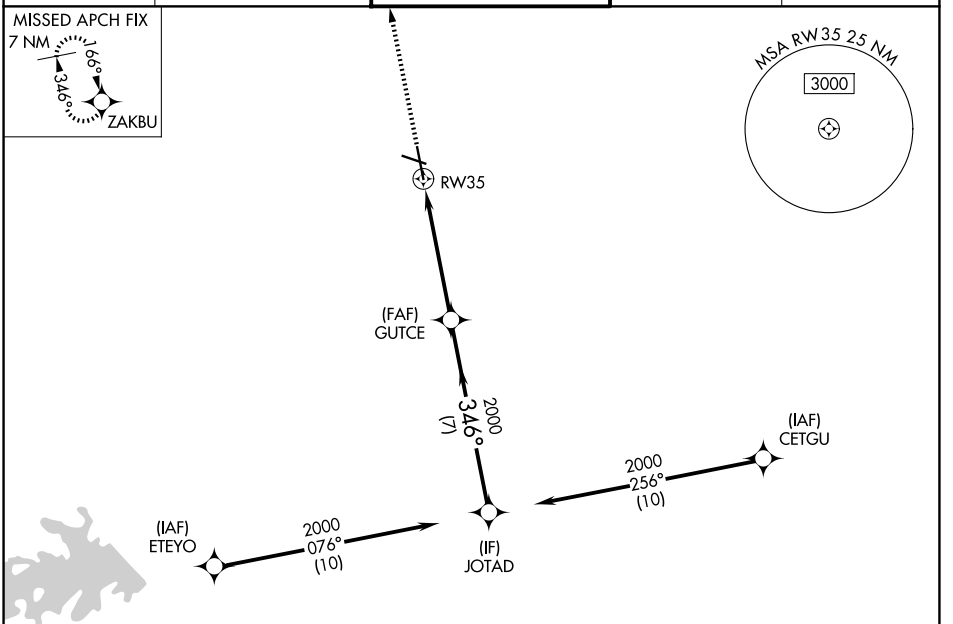


ELEV 321 D TDZE 311

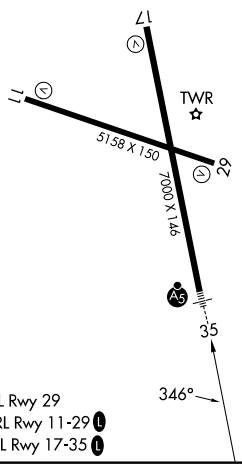


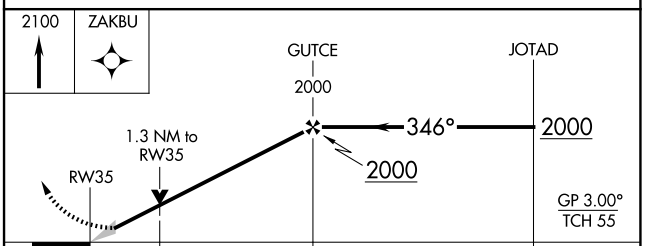


| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| LPV DA | 511-½ 200 (200-½) | | | | |
| LNAV/VNAV DA | 619-½ 308 (300-½) | | | | |
| LNAV MDA | 760-½ 449 (500-½) | | 760-⅞ 449 (500-⅞) | | |
| CIRCLING | 860-1 539 (600-1) | 880-1 559 (600-1) | 1000-2 679 (700-2) | 1180-2¾ 859 (900-2¾) | 1180-3 859 (900-3) |



SC-5, 16 APR 2026 to 14 MAY 2026
SC-5, 16 APR 2026 to 14 MAY 2026