




|  |                        |   |             |
|--|------------------------|---|-------------|
| WAAS<br>CH <b>42805</b><br><b>W05A</b> | APP CRS<br><b>051°</b> | Rwy Ldg<br>TDZE <b>136</b><br>Apt Elev <b>142</b> | <b>5000</b> |
|--|------------------------|---|-------------|

# RNAV (GPS) RWY 5

LAKELAND LINDER INTL (LAL)


|           |   |  |
|-----------|---|--|
| RNP APCH. | <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.</p> <p>▲ When local altimeter setting not received, use Plant City altimeter setting: increase LPV DA to 354 feet; increase LNAV/VNAV DA to 523 feet; increase all MDA 20 feet and LNAV Cat C/D visibility 1/8 SM. Baro-VNAV and VDP NA when using Plant City altimeter setting. Circling NA to Rwys 8, 26.</p> | MISSED APPROACH: Climb to 2000 direct OBTOQ and left turn on track 313° to PLUMY and hold. |
|-----------|---|--|

|                        |                                      |  |                         |
|------------------------|--------------------------------------|--|-------------------------|
| ATIS<br><b>118.025</b> | TAMPA APP CON<br><b>120.65 290.3</b> | LAKELAND TOWER<br><b>124.5 236.775</b> | GND CON<br><b>121.4</b> |
|------------------------|--------------------------------------|--|-------------------------|

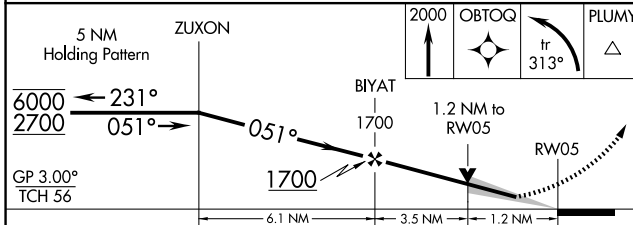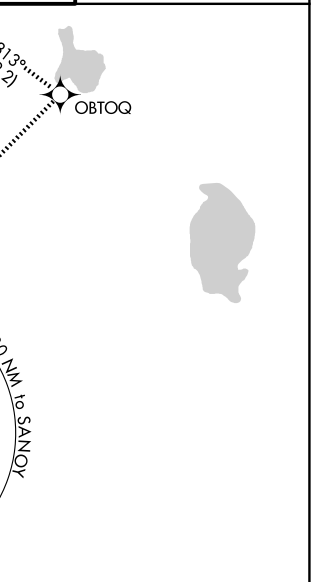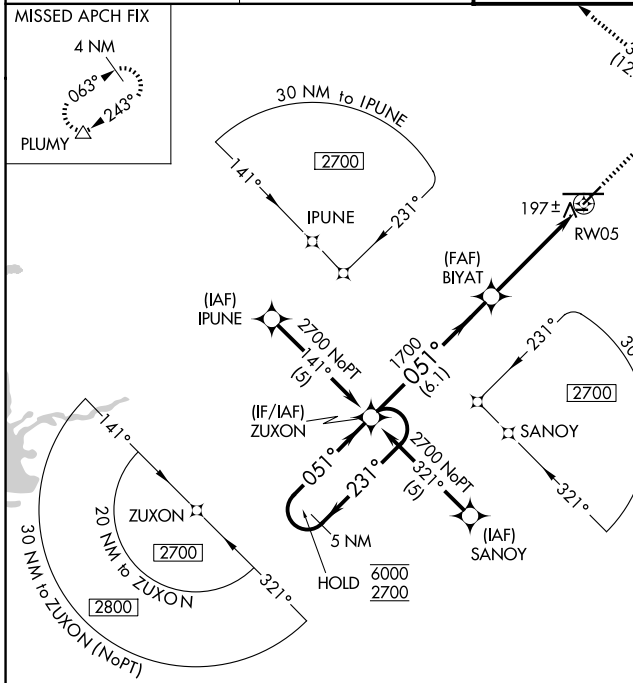

|          |                   |
|----------|-------------------|
| ELEV 142 | <b>D</b> TDZE 136 |
|----------|-------------------|

| CATEGORY     | A                    | B                    | C                            | D                            |
|--------------|----------------------|----------------------|------------------------------|------------------------------|
| LPV DA       |                      | 336-3/4              | 200 (200-3/4)                |                              |
| LNAV/VNAV DA |                      | 505-1 1/4            | 369 (400-1 1/4)              |                              |
| LNAV MDA     | 560-1                | 424 (500-1)          | 560-1 1/4                    | 424 (500-1 1/4)              |
| CIRCLING     | 600-1<br>458 (500-1) | 660-1<br>518 (600-1) | 720-1 1/2<br>578 (600-1 1/2) | 840-2 1/4<br>698 (700-2 1/4) |

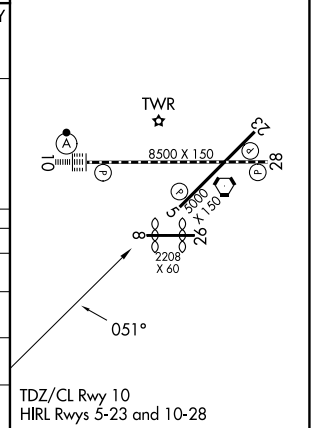

SE-3, 16 APR 2026 to 14 MAY 2026

SE-3, 16 APR 2026 to 14 MAY 2026