



WAAS CH 49119 W19B	APP CRS 196°	Rwy Ldg TDZE Apt Elev	7302 1320 1333
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 19L

WICHITA DWIGHT D EISENHOWER NTL (ICT)

RNP APCH.	<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Simultaneous approach authorized with ILS or LOC RWY 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.</p>	MALSR 	MISSED APPROACH: Climb to 3600 direct YELOO and hold.
-----------	---	-----------	--

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

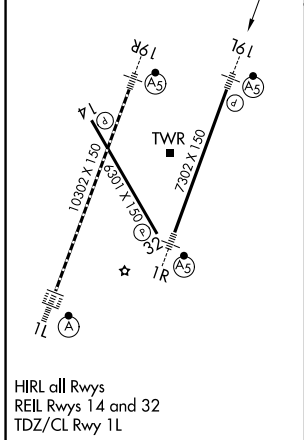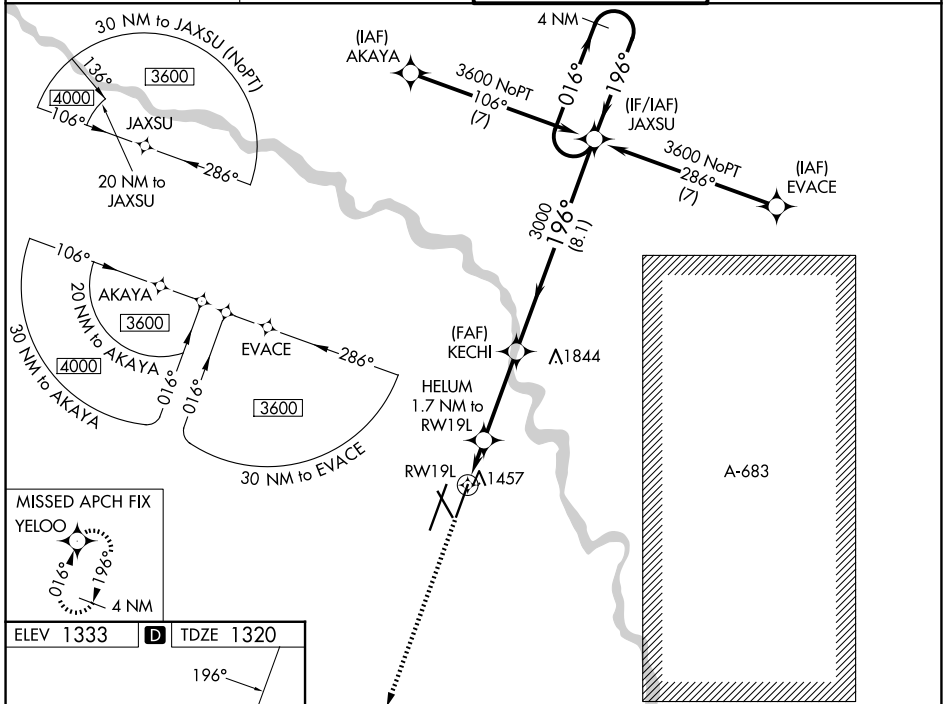

ELEV 1333	D	TDZE 1320		
3600	YELOO			
3000	KECHI	JAXSU		
1900*	HELUM 1.7 NM to RWY 19L	4 NM Holding Pattern		
*LNAV only.				
1.1 NM	0.6	3.4 NM		
GP 3.00° TCH 54				
CATEGORY	A	B	C	D
LPV DA		1520-½	200 (200-½)	
LNAV/VNAV DA		1747-¾	427 (500-¾)	
LNAV MDA	1780-½	460 (500-½)	1780-⅞	460 (500-⅞)
CIRCLING	1800-1	467 (500-1)	1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)