
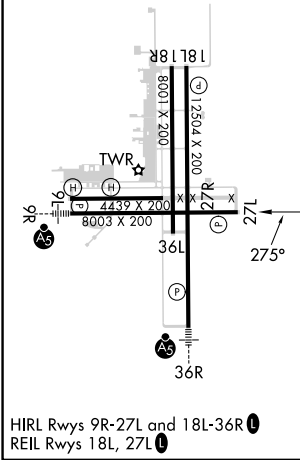


WAAS CH 97716 W27A	APP CRS 275°	Rwy Idg TDZE Apt Elev	8003 72 80
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L

CECIL (VQQ)

RNP APCH.		CECIL TOWER★		GND CON	CLNC DEL	GCO
Rwy 27L helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C.		126.1 (CTAF) 0 235.625		121.625 226.675	123.975 254.25	135.075
ATIS	JACKSONVILLE APP CON	CECIL TOWER★		GND CON	CLNC DEL	GCO
125.275	127.775 377.075	126.1 (CTAF) 0 235.625		121.625 226.675	123.975 254.25	135.075

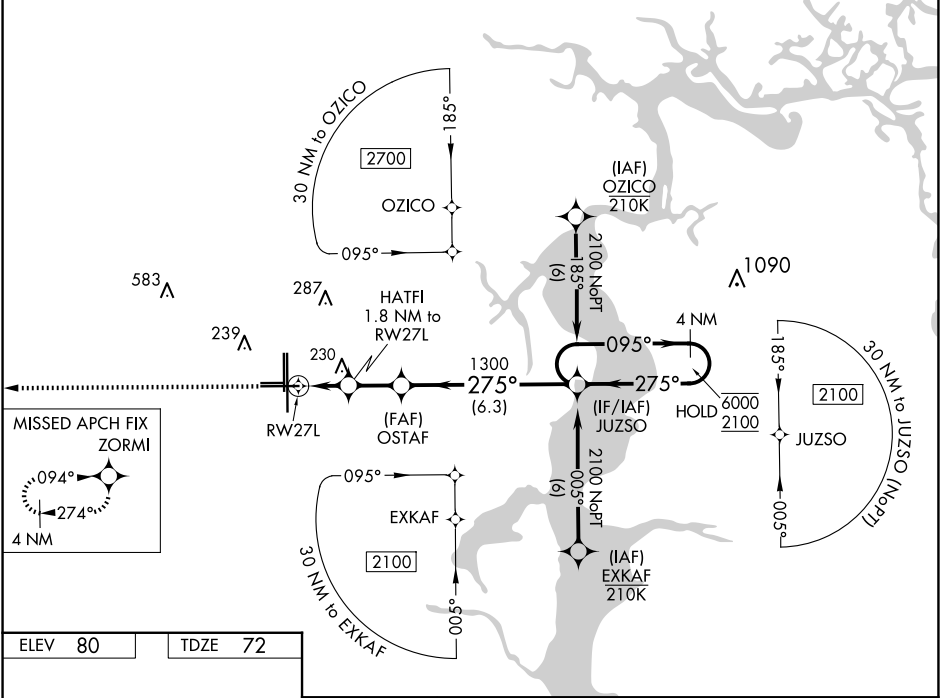

ELEV 80	TDZE 72	2000 ZORMI VGSi and RNAV glidepath not coincident (VGSi 3.00 Angle/TCH 67).		4 NM Holding Pattern
		*LNAV only. *1 NM to RWY 27L.		
CATEGORY LPV DA LNAV/ VNAV DA LNAV MDA CIRCLING	A 393-1 451-1 540-1 540-1 460 (500-1)	B 321 (400-1) 451-1 468 (500-1) 560-1 480 (500-1)	C 321 (400-1) 379 (400-1) 540-1 3/8 520 (600-1 1/2)	D 6000 2100 GP 3.00° TCH 50 640-2 560 (600-2)

SE-3, 16 APR 2026 to 14 MAY 2026

SE-3, 16 APR 2026 to 14 MAY 2026