

LOC/DME I-JDL <u>109.9</u> Chan 36	APP CRS 071°	Rwy Ldg 8457 TDZE 25 Apt Elev 25
--	------------------------	---

LDA X RWY 8
JUNEAU INTL (JNU)(PAJN)

ADF required.


   	Circling to Rwy 26 NA at night. Circling NA north of Rwy 8-26. Rwy 8 helicopter visibility reduction below 1 SM NA. Inop table does not apply. When Juneau altimeter setting not received, procedure NA. CAUTION: Any go-around after passing MAP will not provide standard obstruction clearance. Circling Cat A night visibility minimum 5 SM, Circling Cat B, C, D night visibility minimum 10 SM. Straight-in Rwy 8 at night, operational VGSi required, remain on or above VGSi glidepath until threshold.
---	--

MALSF




MISSED APPROACH: Immediate climbing right turn to 5600 on heading 310° and on CGL NDB bearing 251° to intercept SSR VORTAC R-027 direct SSR VORTAC or EEF NDB and hold.

ATIS 135.2	ANCHORAGE CENTER 133.9	JUNEAU TOWER ★ 118.7 (CTAF) 0 278.3	GND CON 121.9	CLNC DEL 121.9	JUNEAU RADIO 122.2	UNICOM 122.95
---------------	---------------------------	--	------------------	-------------------	-----------------------	------------------

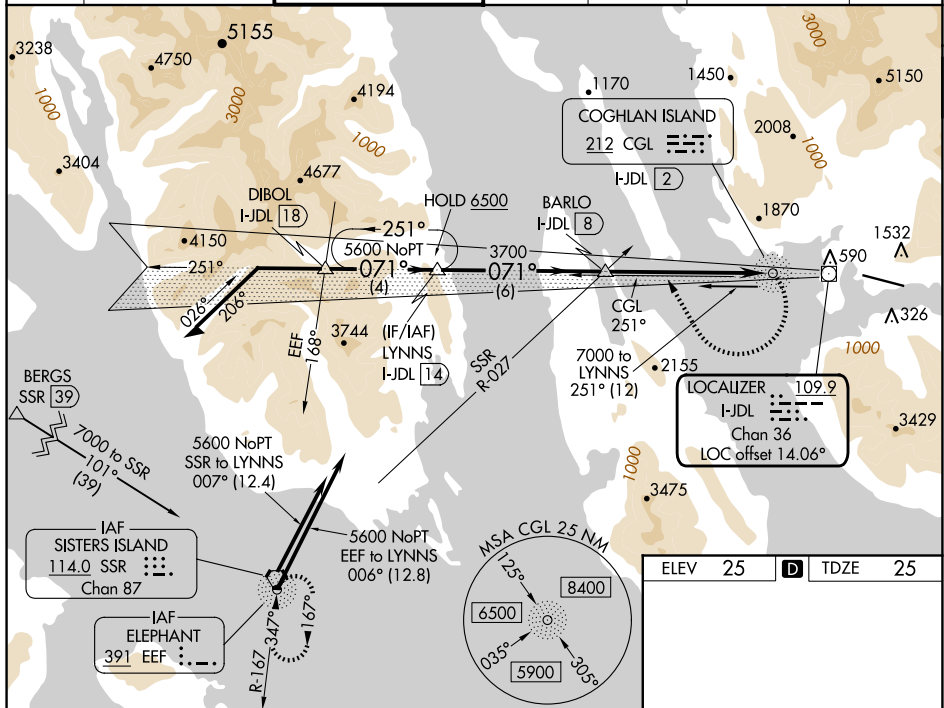

ELEV	25	D	TDZE	25
------	----	----------	------	----

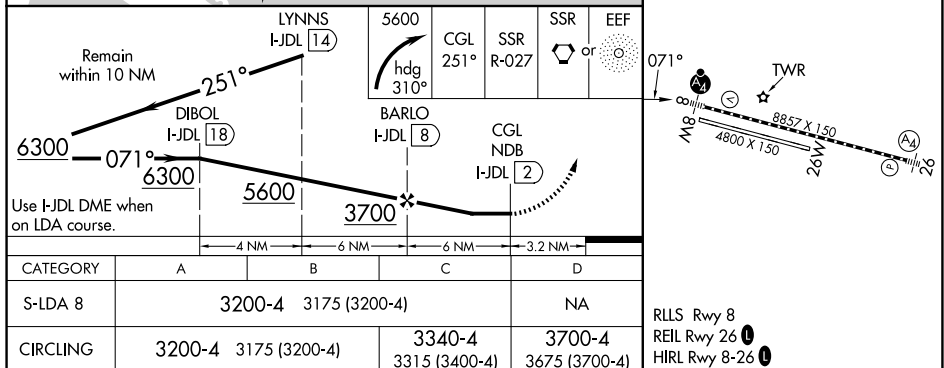

LDA X RWY 8