RNAV (GPS) RWY 36

HOUMA-TERREBONNE (HUM)

WAAS	APP CRS	Rwy Idg	6508
CH 56413	359°	TDZE	8
W36A		Apt Elev	9

Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase LPV DA to 408, LNAV/VNAV DA to 518, and all visibilities ⅛ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2300 direct RACEL and hold.

ATIS	NEW ORLEANS APP CON	HOUMA TOWER ★	GND CON	CLNC DEL	UNICOM
120.25	118.9 350.35	125.3 (CTAF) L 346.3	123.875	118.9 (When twr closed)	122.95

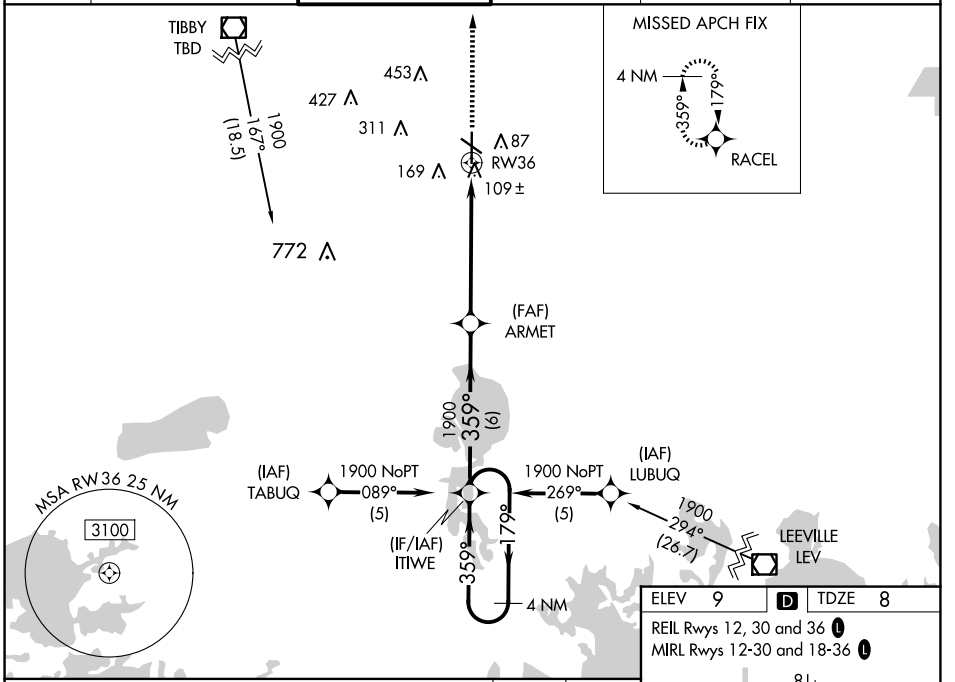

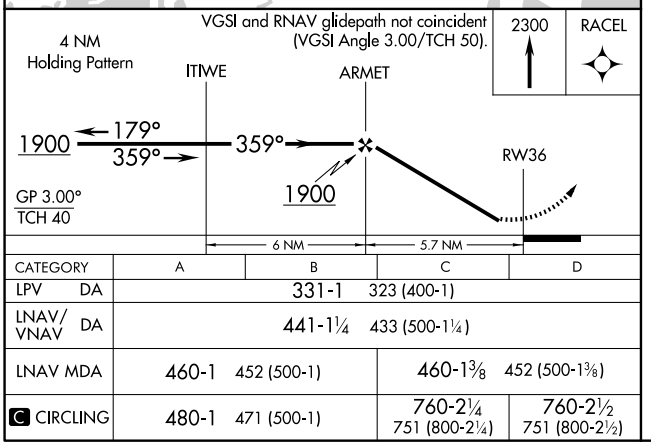

CATEGORY	A	B	C	D
LPV DA	331-1	323 (400-1)		
LNAV/VNAV DA	441-1¼	433 (500-1¼)		
LNAV MDA	460-1	452 (500-1)	460-1⅜	452 (500-1⅜)
C CIRCLING	480-1	471 (500-1)	760-2¼ 751 (800-2¼)	760-2½ 751 (800-2½)

ELEV 9	D	TDZE 8

REIL Rwys 12, 30 and 36 L
MIRL Rwys 12-30 and 18-36 L

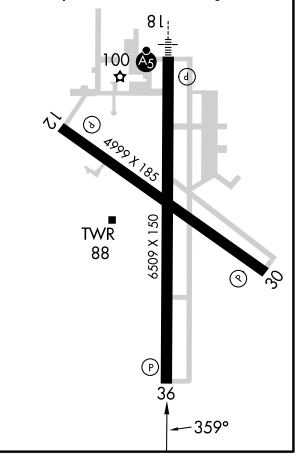

SC-4, 16 APR 2026 to 14 MAY 2026
SC-4, 16 APR 2026 to 14 MAY 2026