


WAAS CH <b>45521</b> <b>W05A</b>	APP CRS <b>048°</b>	Rwy Ldg TDZE Apt Elev	<b>5000</b> <b>8</b> <b>9</b>
--	------------------------	-----------------------------	-------------------------------------

# RNAV (GPS) RWY 5

GROTON-NEW LONDON (GON)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 2100 direct BRRET and on track 068° to BABET and hold, continue climb-in-hold to 2100.
<p><b>⚠</b> Circling Rwy 15 NA at night. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats visibility C/D to 1½%.</p>			
ATIS <b>127.0</b>	PROVIDENCE APP CON * <b>125.75 319.2</b>	GROTON TOWER * <b>125.6 (CTAF) 0 236.775</b>	GND CON <b>121.65 236.775</b>

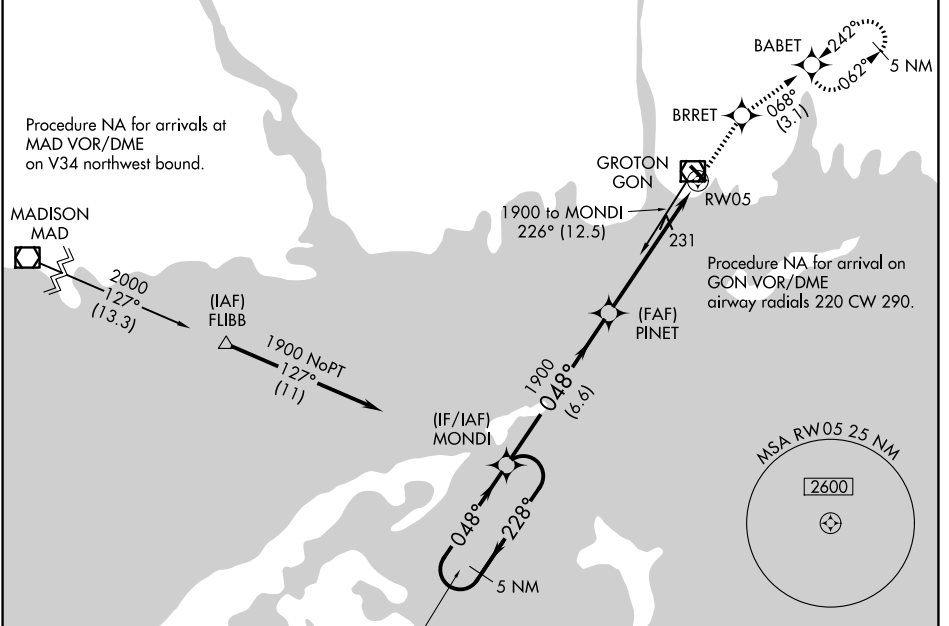

NE-1, 16 APR 2026 to 14 MAY 2026

NE-1, 16 APR 2026 to 14 MAY 2026

ELEV 9	TDZE 8
--------	--------

5 NM Holding Pattern	2100	BRRET	BABET
	↑		
		Tr 068°	

CATEGORY	A	B	C	D
LPV DA		292/24	284 (300-½)	
LNAV/VNAV DA		533/55	525 (600-1)	
LNAV MDA	500/24	492 (500-½)	500/50	492 (500-1)
CIRCLING	580-1 571 (600-1)	620-1 611 (700-1)	700-2 691 (700-2)	840-2¾ 831 (900-2¾)

REIL Rws 23 and 33  
HIRL Rws 5-23 and 15-33