| WAAS | APP CRS | Rwy Ldg | 6201 |
|---|---|---|---|
| CH 87015 | 058° | TDZE | 2105 |
| W06A | | Apt Elev | 2105 |

# RNAV (GPS) RWY 6
## NEW RIVER VALLEY (PSK)

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 44°C. When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet. VDP and Baro-VNAV NA when using Blacksburg altimeter setting. Inop table does not apply to LPV all Cats and LNAV Cats A and B. For inop MALSR, increase LNAV Cat C visibility to 1¼ SM. Circling NA for Cat D northwest of Rwy 6-24.

MALSR A5

MISSED APPROACH: Climb to 6000 direct OHICE and right turn via track 171° to FAPOM and via track 186° to WILIZ and hold.

| AWOS-3 | ROANOKE APP CON | ROANOKE CLNC DEL | UNICOM |
|---|---|---|---|
| 127.375 | 126.0 339.8 | 121.7 | 122.7 (CTAF) L |

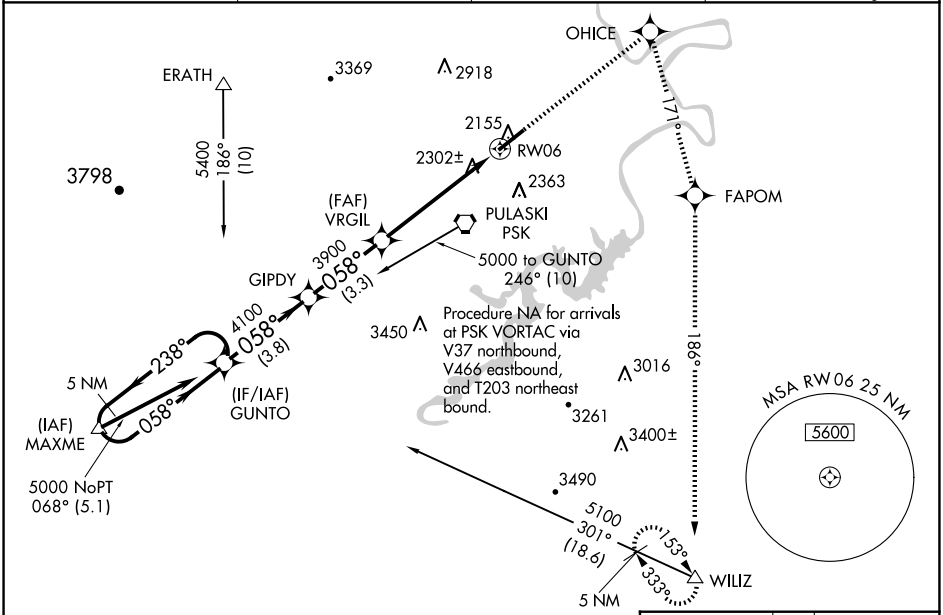


| ELEV 2105 | TDZE 2105 |
|---|---|

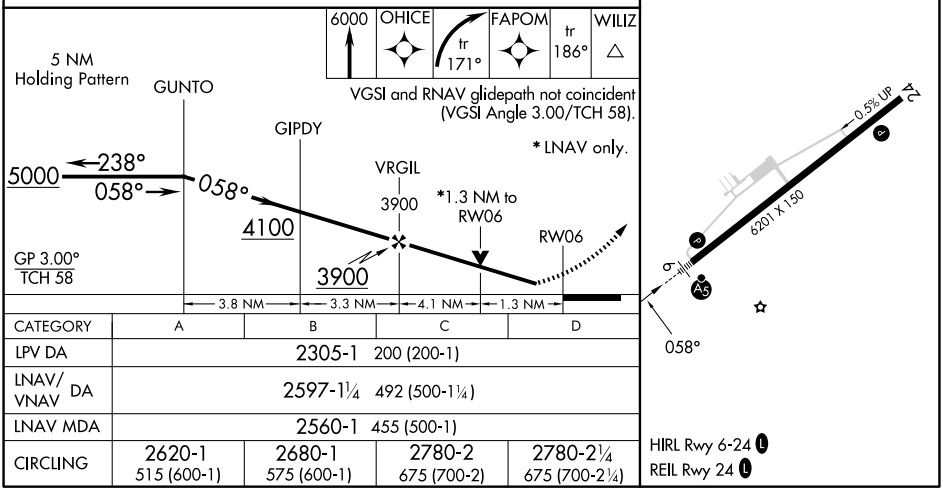


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 2305-1 200 (200-1) | | | |
| LNAV/VNAV DA | 2597-1¼ 492 (500-1¼) | | | |
| LNAV MDA | 2560-1 455 (500-1) | | | |
| CIRCLING | 2620-1 515 (600-1) | 2680-1 575 (600-1) | 2780-2 675 (700-2) | 2780-2¼ 675 (700-2¼) |

HIRL Rwy 6-24 L
REIL Rwy 24 L




NE-3, 16 APR 2026 to 14 MAY 2026