


|                           |                        |                         |
|---------------------------|------------------------|-------------------------|
| LOC I-RHI<br><b>111.3</b> | APP CRS<br><b>091°</b> | Rwy Ldg<br><b>6799</b>  |
|                           |                        | TDZE<br><b>1623</b>     |
|                           |                        | Apt Elev<br><b>1623</b> |

# ILS or LOC RWY 9

RHINELANDER/ONEIDA COUNTY (RHI)

|                                |   |                               |   |
|--------------------------------|---|-------------------------------|---|
| ADF or DME required.           |   | MALSR<br>                     | MISSED APPROACH:<br>Climb to 2100 then climbing right turn to 3500 direct ARSHA LOM/RHI VOR/DME 6.8 DME and hold, continue climb-in-hold to 3500. |
| NA<br>** DME from RHI VOR/DME. |   |                               |   |
| ASOS<br><b>126.825</b>         | MINNEAPOLIS CENTER<br><b>133.65 281.5</b> | UNICOM<br><b>123.0 (CTAF)</b> |   |

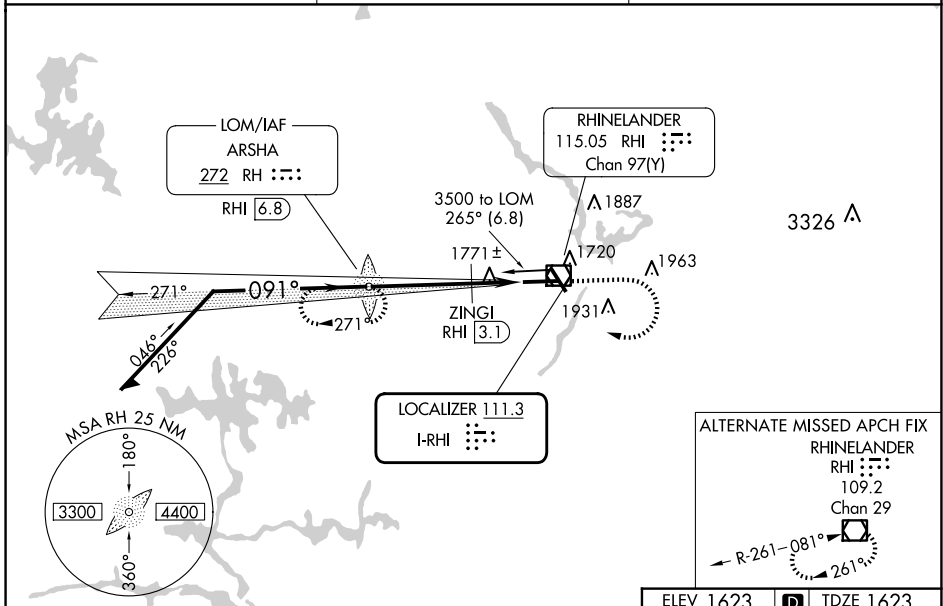

EC-3, 16 APR 2026 to 14 MAY 2026

EC-3, 16 APR 2026 to 14 MAY 2026

|  |                       |        |        |    |
|--|-----------------------|--------|--------|----|
| *2240 when using Tomahawk altimeter setting. | RH LOM RHI <b>6.8</b> | 2100   | 3500   | RH |
| Remain within 10 NM                          | 3477                  |        |        |    |
| GS 3.00° TCH 52                              | *2180                 | 3.7 NM | 1.9 NM |    |

| CATEGORY             | A                  | B                  | C                    | D                  |
|----------------------|--------------------|--------------------|----------------------|--------------------|
| S-ILS 9              | 1823-½ 200 (200-½) |                    |                      |                    |
| S-LOC 9              | 2180-½ 557 (600-½) | 2180-1 557 (600-1) |                      |                    |
| CIRCLING             | 2180-1 557 (600-1) | 2260-1 637 (700-1) | 2260-1¾ 637 (700-1¾) | 2280-2 657 (700-2) |
| ZINGI FIX MINIMUMS** |                    |                    |                      |                    |
| S-LOC 9              | 2040-½ 417 (500-½) | 2040-¾ 417 (500-¾) |                      |                    |
| CIRCLING             | 2100-1 477 (500-1) | 2260-1 637 (700-1) | 2260-1¾ 637 (700-1¾) | 2280-2 657 (700-2) |

|   |      |           |      |      |      |
|---|------|-----------|------|------|------|
| ELEV 1623   |      | TDZE 1623 |      |      |      |
| HIRL Rws 9-27 and 15-33<br>REIL Rws 15, 27 and 33 |      |           |      |      |      |
| FAF to MAP 5.6 NM                                 |      |           |      |      |      |
| Knots   | 60   | 90        | 120  | 150  | 180  |
| Min:Sec   | 5:36 | 3:44      | 2:48 | 2:14 | 1:52 |