
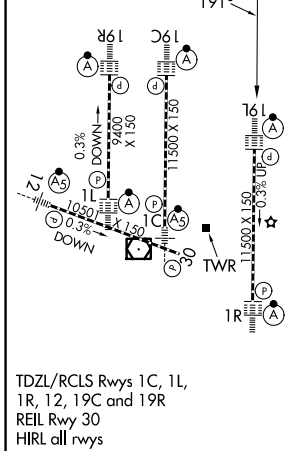


APP CRS	Rwy Ldg	11500
191°	TDZE	302
	Apt Elev	312

RNAV (RNP) Z RWY 19L

WASHINGTON DULLES INTL (IAD)

RNP AR APCH - GPS.		ALSIF-2	MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct ASPER and hold.
<p>▼ For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.</p>			
D-ATIS	POTOMAC APP CON	DULLES TOWER	GND CON
134.85	120.45 306.925 (241°-330°)	120.1 317.8 (Rwys 1R/19L)	121.9 317.8 (EAST)
	128.525 306.925 (091°-240°)	120.25 348.6 (Rwy 1C/19C)	121.625 348.6 (WEST)
	126.1 338.25 (331°-090°)	134.425 348.6 (Rwys 1L/19R and 12/30)	

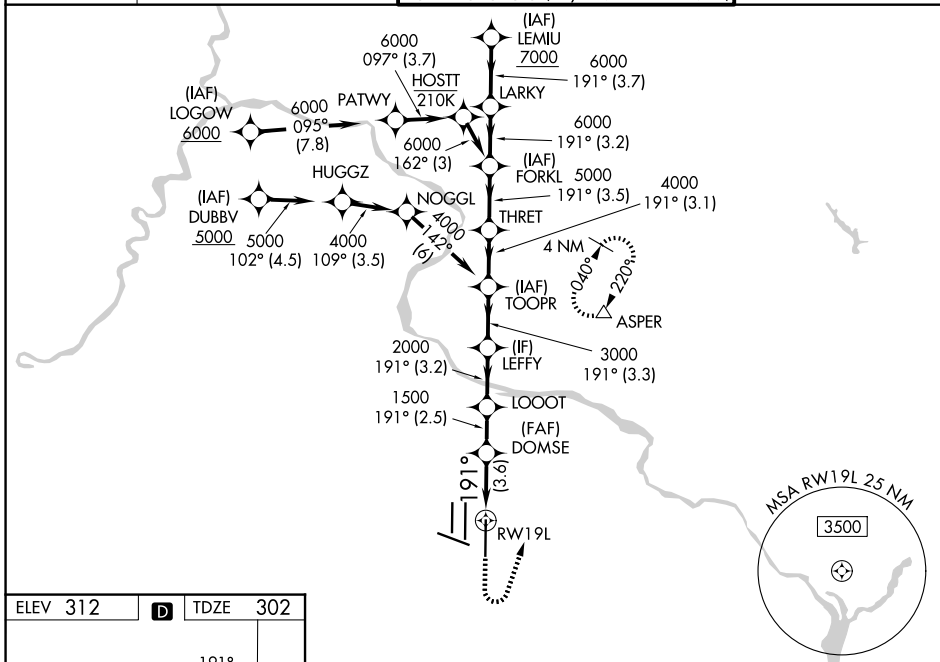

800	3000	ASPER	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		LEMIU
RWY 19L			1500	2000	3000
			3000	4000	5000
			6000	6000	7000
			GP 3.00°		TCH 55
			3.6 NM	2.5 NM	3.2 NM
			3.3 NM	3.1 NM	3.5 NM
			3.2 NM	3.7 NM	
CATEGORY	A	B	C	D	
RNP 0.11 DA		620/24	318 (400-1/2)		
RNP 0.15 DA		684/35	382 (400-5/8)		
RNP 0.30 DA		730/40	428 (500-3/4)		

AUTHORIZATION REQUIRED

NE-3, 16 APR 2026 to 14 MAY 2026

NE-3, 16 APR 2026 to 14 MAY 2026