WAAS CH 53516 W22A	APP CRS 219°	Rwy Ldg 6184 / TDZE 666 / Apt Elev 674

RNAV (GPS) RWY 22

BATTEN INTL (RAC)

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use MKE altimeter setting and increase LPV DA to 984 feet; increase LNAV/VNAV DA to 1032 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D 1¼ SM, and Circling visibility Cat C/D 1¼ SM. Circling Rwy 14, 22, 32 NA at night. Rwy 22 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using MKE altimeter setting. Straight-in Rwy 22 NA at night.

MISSED APPROACH: Climb to 3000 direct UCLID and track 277° to VEENA and hold.

ASOS	MILWAUKEE APP CON	CLNC DEL	UNICOM
121.425	135.875 317.725	120.15	123.075 (CTAF) L

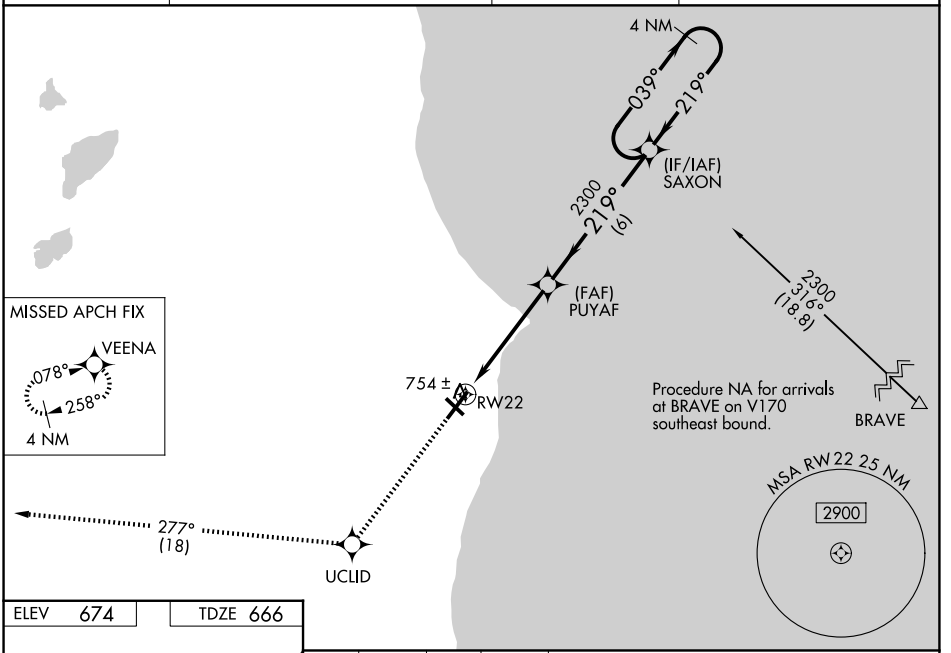

ELEV 674 TDZE 666

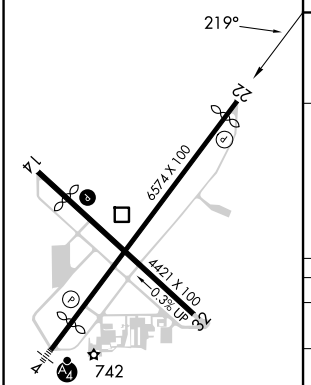

HIRL Rwy 4-22 L
MIRL Rwy 14-32 L
REIL Rwys 14, 22 and 32 L

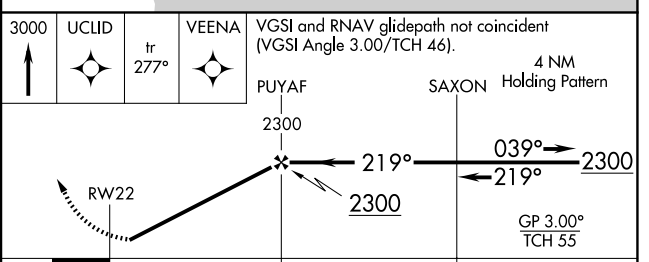

CATEGORY	A	B	C	D
LPV DA	949-1	283 (300-1)		
LNAV/VNAV DA	997-1	331 (400-1)		
LNAV MDA	1080-1	414 (500-1)	1080-1⅛	414 (500-1⅛)
CIRCLING	1140-1 466 (500-1)	1160-1 486 (500-1)	1380-2 706 (800-2)	1380-2¼ 706 (800-2¼)

EC-3, 16 APR 2026 to 14 MAY 2026
EC-3, 16 APR 2026 to 14 MAY 2026