

WAAS CH 77507 W29A	APP CRS 294°	Rwy Ldg TDZE Apt Elev	8099 531 544
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29

ST LOUIS RGNL (ALN)


RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.



MALSRL

MISSED APPROACH:
Climb to 2400 direct SQUAR and hold.

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER* 126.0(CTAF) 0 239.0	GND CON 120.2	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

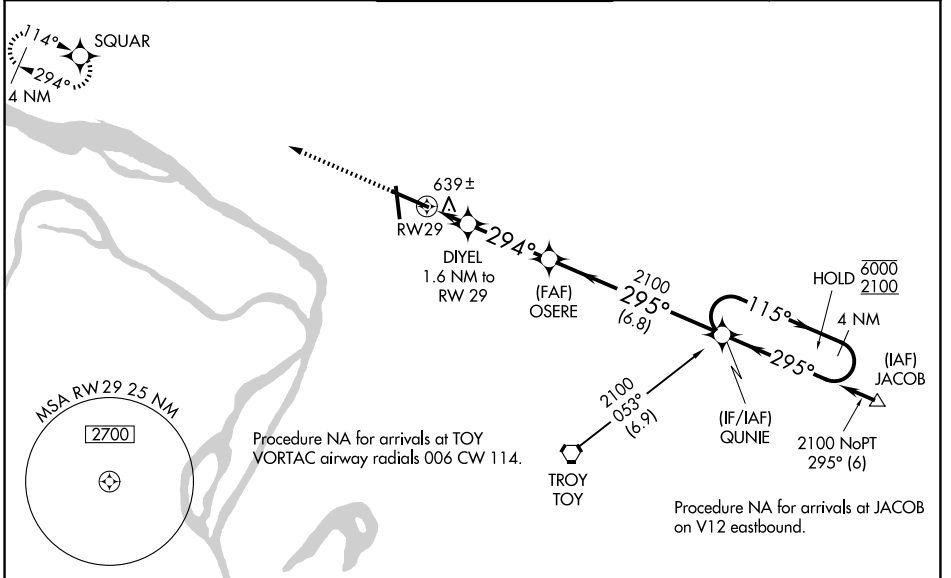

ELEV 544	D	TDZE 531
----------	----------	----------

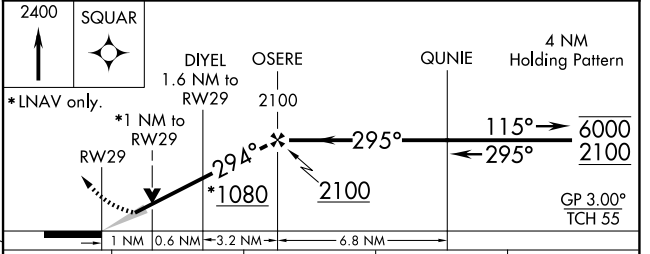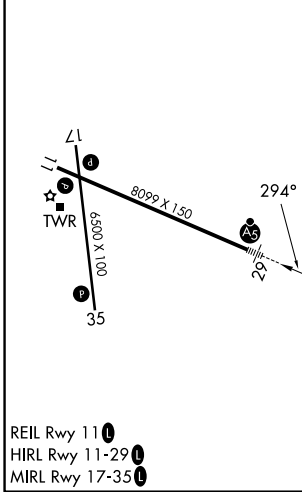

	CATEGORY	A	B	C	D
LPV	DA		731-½	200 (200-½)	
LNAV/VNAV	DA		825-½	294 (300-½)	
LNAV	MDA	900-½	369 (400-½)	900-¾	369 (400-¾)
CIRCLING		1000-1	456 (500-1)	1160-1¾ 616 (700-1¾)	1200-2 656 (700-2)

EC-3, 16 APR 2026 to 14 MAY 2026

EC-3, 16 APR 2026 to 14 MAY 2026