WAAS CH 72711 W13A	APP CRS 133°	Rwy Ldg 6504 TDZE 1115 Apt Elev 1119

RNAV (GPS) RWY 13

THIEF RIVER FALLS RGNL (TVF)

Baro-VNAV and VDP NA when using Crookston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crookston altimeter setting: increase LPV DA to 1447 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1518 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ⅜ SM.

MISSED APPROACH: Climb to 2700 direct ZUDOL and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.025	132.15 269.6	122.8 (CTAF) L

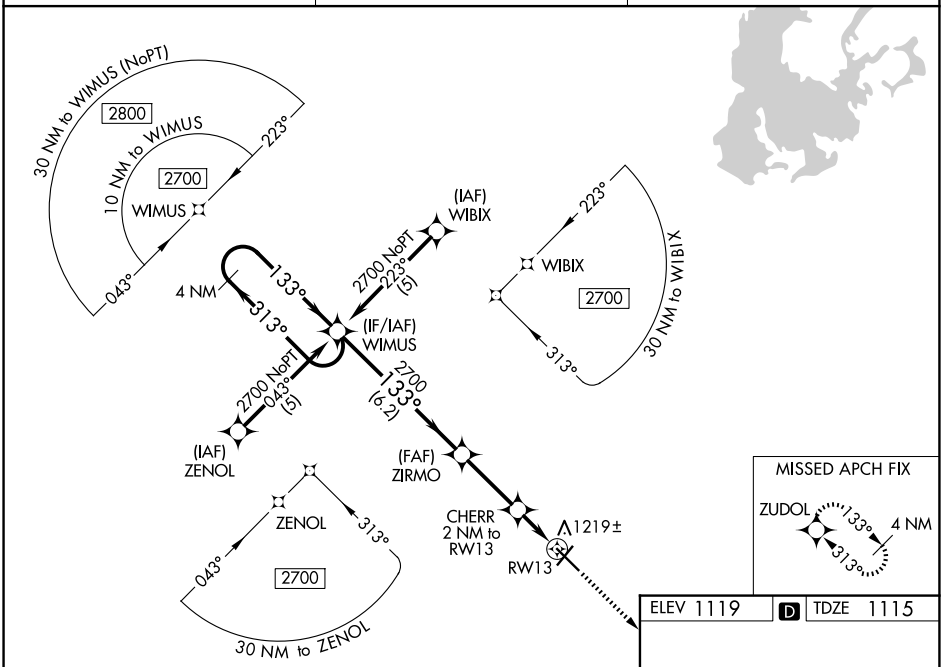

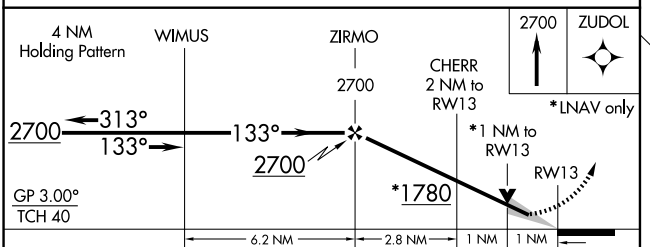

CATEGORY	A	B	C	D
LPV DA	1365-1 250 (300-1)			
LNAV/VNAV DA	1436-1¼ 321 (400-1¼)			
LNAV MDA	1480-1 365 (400-1)			1480-1¼ 365 (400-1¼)
CIRCLING	1540-1 421 (500-1)	1580-1 461 (500-1)	1820-2 701 (800-2)	1980-2¾ 861 (900-2¾)

ELEV 1119 D TDZE 1115



HIRL Rwy 13-31 L
MIRL Rwy 4-22 L
REIL Rwys 4, 13 and 22 L

NC-1, 16 APR 2026 to 14 MAY 2026
NC-1, 16 APR 2026 to 14 MAY 2026